



Index

Firestay Duo

CCT 4 COLOUR / 2 WATTAGE SWITCHABLE

Integrated LED Fixed /Centre Tilt Downlight


The Firestay Duo LED CCT is a High Output Downlight ideal for high ceilings or any project requiring high intensity light, 4 way colour and 2 wattages switchable straight out of the box.

With a 8 year product warranty, the front facing switch enables the user to seamlessly change the colour temperature (2700/3000/4000/6000K) to suit the mood of any space while the wattage switch enables you to instantly dictate the light level of any commercial or residential premises.

- Firestay Certification: 30, 60 and 90 minute solid joist ceilings, 30 minute I-Joist & Metal Web ceiling systems
- IP65
- Front CCT switch
- 8 in 1 Fixture: 4 colour temperatures, 2 wattages
- White, Satin, Chrome, Brass, Antique Brass & Matt Black bezels available
- Part B / C / E compliant
- Lever Tool-Free Terminal
- 60° Beam Angle
- Spacer plate options available



LMR80: Maximum 20% of lumen depreciation over rated hours.
B10: Maximum 10% of fittings failure rate over rated hours

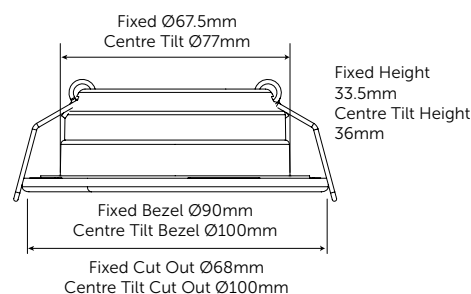

Wattage Selected	Colour Temp (K) Selected	Lumens (lm)	Candelas (cd)
4W	2700	475	380
	3000	495	400
	4000	525	415
	6000	540	425
6W	2700	640	520
	3000	671	540
	4000	725	570
	6000	740	580

IC Rated up to 350mm insulation

Bezels sold separately

www.belllighting.co.uk

technical@belllighting.co.uk


sales@belllighting.co.uk

Firestay Duo

CCT 4 COLOUR / 2 WATTAGE SWITCHABLE

Integrated LED Fixed / Centre Tilt Downlight

The Firestay Duo LED has a 2 easily accessible colour and wattage switches located under the bezel on the front of the downlight. Simply move the switches to select your colour temperature & wattage option.

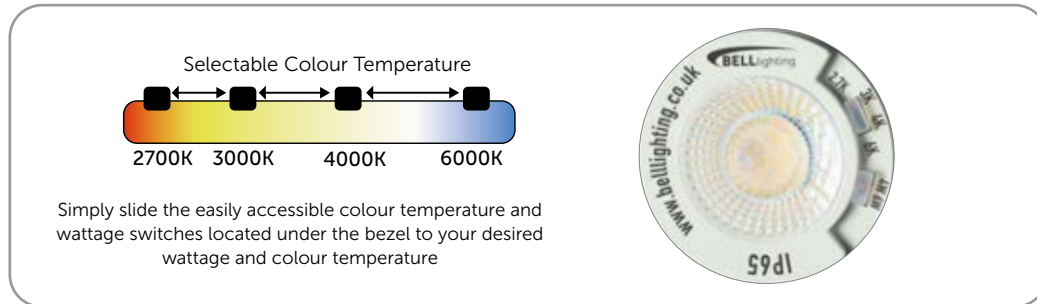

Firestay Duo

CCT 4 COLOUR / 2 WATTAGE SWITCHABLE

Technical Specification	
Construction	Die-Cast Aluminium
Driver	BELL
LED Chip	Epistar
IP Rating	IP65
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

Code	Description	Colour Temperature	Lm	Cd	Beam ⁰	Hrs
11370V2	4/6W Firestay Duo LED CCT Switchable Wattage Fixed Downlight, CCT, P&P, 60° Beam Lever Tool-Free Terminal	2.7/3/4/6000	475-740	380-580	60°	50000
11377V2	Contractor Pack containing 10X above downlights + white bezels	2.7/3/4/6000	475-740	380-580	60°	50000
11372	Satin Bezel for above	-	-	-	-	-
11371	Matt White Bezel for above	-	-	-	-	-
11373	Chrome Bezel for above	-	-	-	-	-
11374	Brass Bezel for above	-	-	-	-	-
11375	Antique Brass Bezel for above	-	-	-	-	-
11376	Matt Black Bezel for above	-	-	-	-	-
08196	Emergency Pack for above	-	-	-	-	-
11380V2	4/6W Firestay Duo LED CCT Switchable Wattage, Centre Tilt Downlight, CCT, P&P, 60° Beam Angle. Tool Free Termination	2.7/3/4/6000	415-635	415-565	60°	50000
11381	Matt White Bezel for above	-	-	-	-	-
11382	Satin Bezel for above	-	-	-	-	-
11383	Chrome Bezel for above	-	-	-	-	-
11384	Brass Bezel for above	-	-	-	-	-
11385	Antique Brass Bezel for above	-	-	-	-	-
11386	Matt Black Bezel for above	-	-	-	-	-
08196	Emergency Pack for above	-	-	-	-	-

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)