

Installation instructions for RECTD.

Ensure the mains power is turned off before working with this fitting.

If you do not feel fully confident when dealing with electrical procedures, seek the advice of a qualified electrician.

Specifications

Working Voltage	DC12V/24V
Maximum Load	24W/48W
Quiescent Current	0.3mA
Class	Class III
Working Temperature	-20 - + 45 C
Adjustment Method	Voltage Control

Functions

This dimmer is a touch dimmer. Touch on the dimmer button for less than 0.5 seconds to turn on and off. Hold your finger on the button for longer than 0.5 seconds to dim up and down (high – low- high).




Installation:

1. Turn off the mains power supply before starting the installation of this fitting.
2. Cut out a hole for the recessed touch dimmer to be placed. Make sure that there is enough cable to connect to the light fitting and driver.
The diameter of the cut out needs to be 18mm



3. There are two cables coming out of the back of the touch dimmer switch. One is labelled input and the other is labelled output. Plug the cable labelled input into the connection block from the driver.

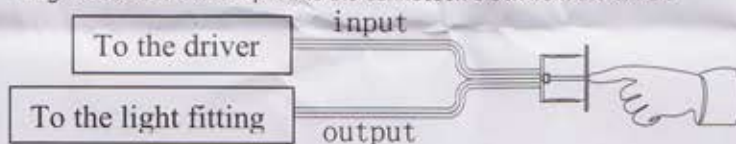

4. Connect the output cable into the light fitting.
5. Once all connections have been made turn the mains power back on to the driver to begin using the product.



Not for general waste. Please contact your local authority on how to dispose correctly.