



AGALIA/MINI

Galia Mini CCT 4W



Features

Surface mounting ultra-slim low level square pathway light with downward light suitable for residential, hospitality and commercial applications

Die-cast aluminium construction with textured graphite paint finish

Two sizes available; Mini and Maxi

Push-fit loop-in, loop-out terminals for ease and speed of installation

Selectable CCT between 3000K and 4000K

Modern concrete and rust cover options available

Non-dimmable


General Information

Colour / Finish	Graphite
IP Rating	IP65
IK Rating	IK09
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 B50 59, 000
Warranty (Years)	3
Length (mm)	140
Height (mm)	113
Depth (mm)	32

Technical Information

Wattage	4W
Lumens Delivered	117lm (4000K)
Lm/W	15lm (4000K)
CRI	Ra 80
CCT	3000K/4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 40°C
SDCM	6


Datasheet generated from <https://onetimepim.com> last updated Tuesday, July 5, 2022 2:23:11 PM

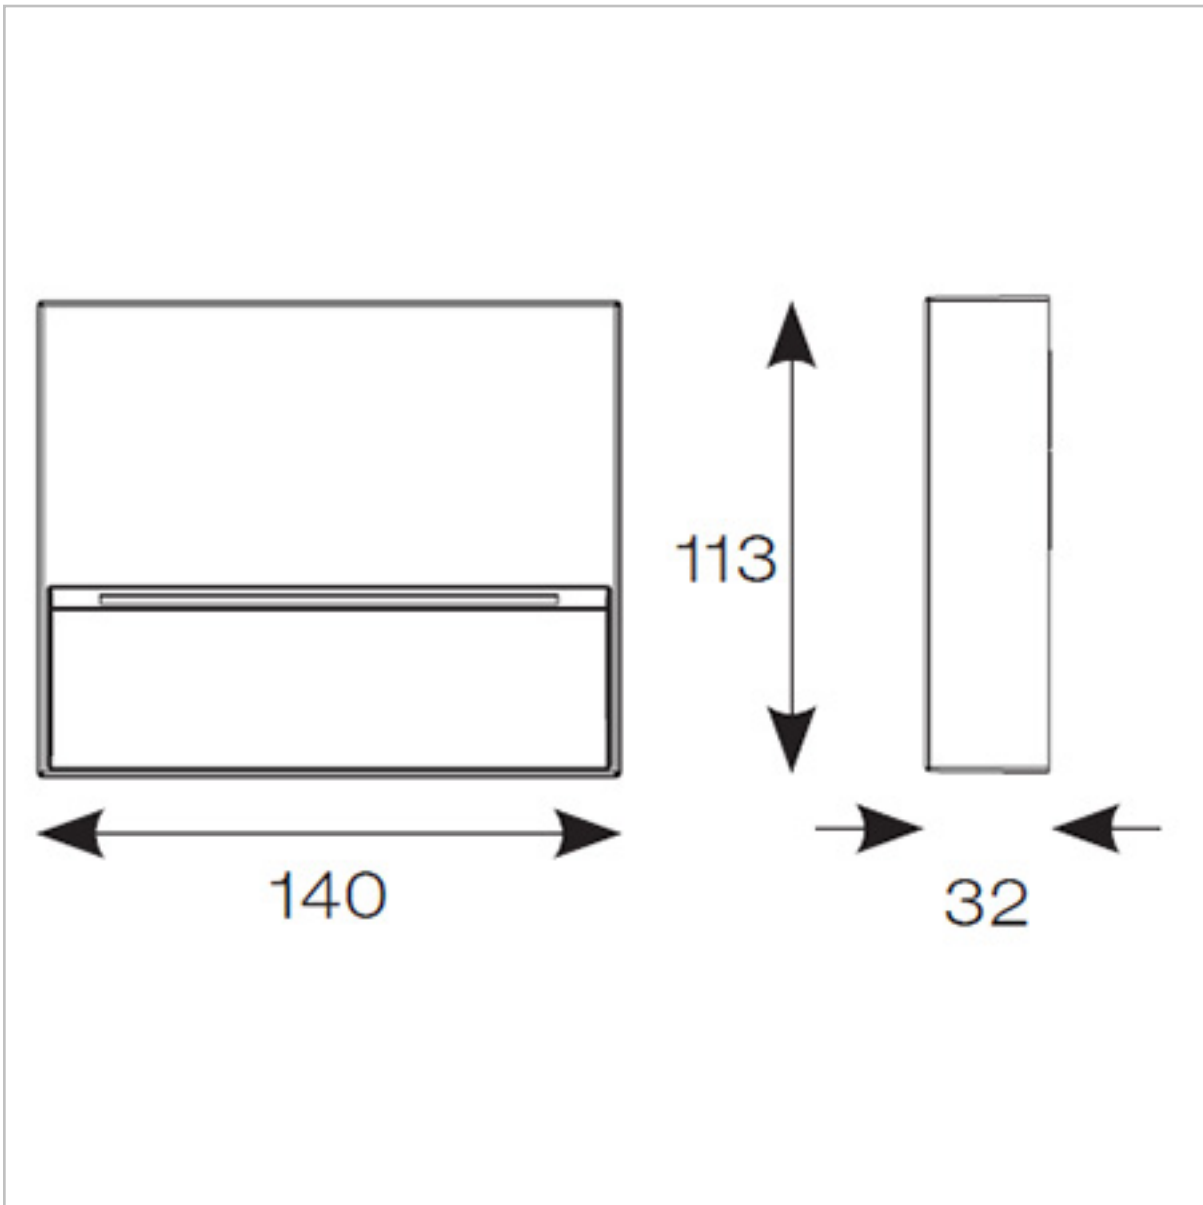



AGALIA/MAXI/RUST

Galia Maxi CCT 8W Rust

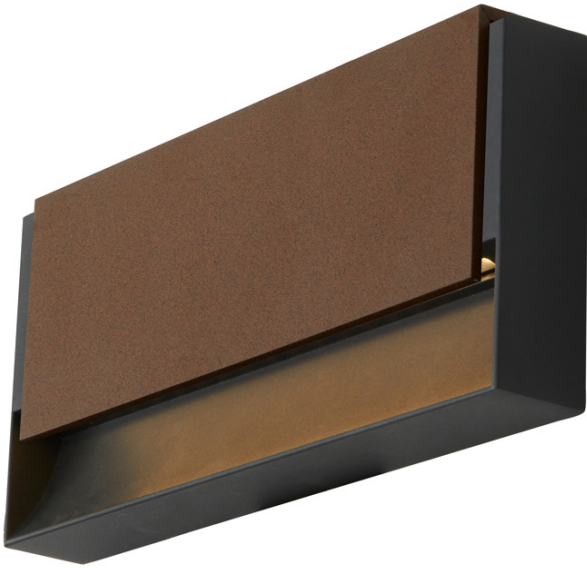

Features

Surface mounting ultra-slim low level square pathway light with downward light suitable for residential, hospitality and commercial applications

Die-cast aluminium construction with textured graphite paint finish

Two sizes available; Mini and Maxi

Push-fit loop-in, loop-out terminals for ease and speed of installation

Selectable CCT between 3000K and 4000K

Modern concrete and rust cover options available

Non-dimmable

General Information

Colour / Finish	Rust
IP Rating	IP65
IK Rating	IK09
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 B50 59, 000
Warranty (Years)	3
Length (mm)	250
Height (mm)	113
Depth (mm)	32

Technical Information

Wattage	8W
Lumens Delivered	220lm (4000K)
Lm/W	27lm (4000K)
CRI	Ra 80
CCT	3000K/4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 40°C
SDCM	6

Datasheet generated from <https://onetimepim.com> last updated Wednesday, July 13, 2022 12:49:59 PM

