



CCT switchable between
2700K & 3000K (default)



Wattage Switchable
between 6,8,10,12, & 15W



Integral photocell as
standard

WARRANTY

Warranty

5 years

FEATURES & BENEFITS

Custom Optical lens design providing excellent
forward throw


0% ULOR (Upward Light Output Ratio) for avoid
light pollution

Suitable for coast - C5-M corrosion
classification (ISO 9223 : 2012)

Designed to illuminate a pathway efficiently
and safely, whilst preserving the habitat

Integral photocell to switch the light ON at dusk
and OFF at dawn

Removeable backplate to aid fast installation

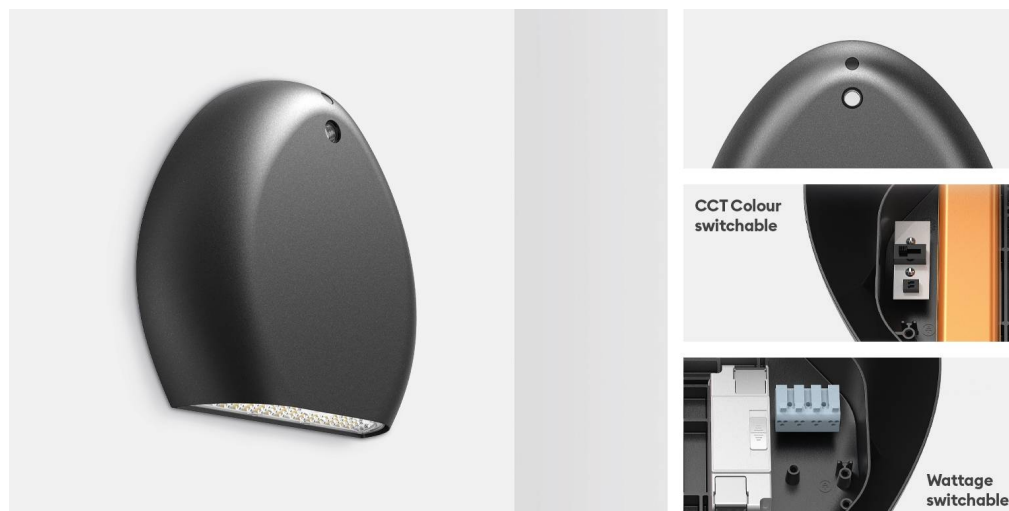

ARC PRO CSP

0% ULOR Wallpack suitable for mounting heights from 2.5 up to 4 metres

FEATURES

IP rating	IP66
IK rating	IK10
CSP Switchable	Switchable CCT
Sensor Option	PC Dusk to Dawn
Dimmable Option	Yes (DALI-2)
LED Lifetime	L70 54,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4
Emergency Option	Yes, Manual-Test

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-30°C - 50°C
Weight	2.6kg
Inrush Current	23A
Construction Material	Double powder coated ADC12 aluminium alloy, uv- resistant polycarbonate lens, stainless steel 316 screws
UK Bathroom Zone	2
Electric Class (1, 2, 3)	1
Suitable for coastal areas	Yes
Install Connector Type	Push-fit terminal, loop- in/loop-out
Mounting Options	Wall

Photometrics @ 25°C


Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
ARPB1N	Matt Black RAL9005	Standard	140° x 70°	6W	2700K	850	142	
					3000K	850	142	
				8W	2700K	1100	138	
					3000K	1100	138	
				10W	2700K	1400	127	
					3000K	1400	127	
				12W	2700K	1650	138	
					3000K	1650	138	
				15W	2700K	2000	133	
					3000K	2000	133	
ARPB1NE	Matt Black RAL9005	Emergency	140° x 70°	6W	2700K	850	142	
					3000K	850	142	
				8W	2700K	1100	138	
					3000K	1100	138	
				10W	2700K	1400	127	
					3000K	1400	127	
				12W	2700K	1650	138	
					3000K	1650	138	
				15W	2700K	2000	133	
					3000K	2000	133	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead

No flying leads are required; a loop-in, loop-out terminal is supplied.



Type of Wiring Required

Parallel



COLLINGWOOD
LIGHTING

LIGHTING INNOVATION