

3 Year Warranty

L70 35,000hrs

Triac dimmable as standard

Emergency option

IP65 Polycarbonate Polished
Chrome and Satin Nickel
bezel options



For Information about AOne ZIGBEE
Visit auroralighting.com

works with

.control



Triac Inline Dimmer



Smart Rotary Dimmer



AU-CX7

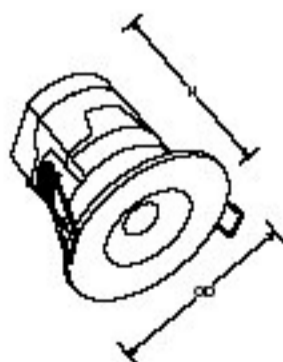

AU-CX7

(H) 80mm Height
(OD) 88mm Overall (Ø)



Colour Switchable LED Fixed Fire Rated Downlight

make smart with



For Information about AOne ZIGBEE
Visit auroralighting.com

Colour temperature can be switched between 3000K, 4000K and 5700K

Lumen output ranges from 580lm at 3000K, 620lm at 4000K and 620lm at 5700K

Integrated driver on board with loop in/loop out terminal block for quick and easy installation

Supplied with a IP65 polycarbonate white bezel (IP65 polycarbonate polished chrome & satin nickel bezel finishes sold separately)

Insulation coverable

Patented fire rated downlight without intumescent

Select colour temperature prior to installation

Tested in 30, 60 and 90 minute solid timber joist, plus 30 minute i-joist and metal web joist fire rated ceilings

Edge-to-edge multifaceted polycarbonate lens for low glare and halogen like appearance
60° beam angle



Supplied with IP65
Polycarbonate White Bezel



AU-BZX7SN



AU-BZX7PC



Switch between
WW-3000K (Warm White)
CW-4000K (Cool White)
DL-5700K (Daylight)



30, 60, 90 minutes (Solid Timber Joists)
30 minutes (I-Joists & Metal Web Joists)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
CX7™ Triac Dimmable Fixed (IP65 when used with IP65 Bezel)						
AU-CX7	7W	3000-5700K	580lm	83	60°	70mm

Bezel Options

AU-BZX7* X7™ Fixed IP65 Polycarbonate Downlight Bezel

*Add suffix PC or SN for Polished Chrome or Satin Nickel finishes.

3 hour Emergency pack AU-FRLM10EMB available, see pg.70

Products in this range pass fire testing with I-Joists, metal web joists and solid timber joists.

Please visit auroralighting.com/gb/ijoist for further information

