


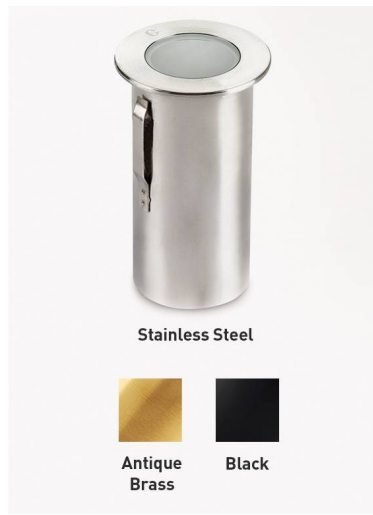

IP68 IP68 perfect for internal or external applications

Coastal protected

IK06 IK06 impact protection - walk over (Stainless Steel only)

GL019 ULTRA LOW GLARE

Low Voltage Ground Light

FEATURES

IP rating	IP68
IK rating	IK06
CSP Switchable	Single CCT
Tiltable	No
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Walk Over / Drive Over	Walk over (Stainless Steel & Antique Brass Only)

INSTALLATION INFORMATION

Input	150mA / 250mA / 350mA
Maximum Ambient Temperature	55°C
Weight	204g
Inrush Current	N/A
Cut Out Size	33mm
Construction Material	Stainless Steel
UK Bathroom Zone	0
SELV	N/A
Electric Class (1, 2, 3)	3
Earth Leakage	N/A
Suitable for coastal areas	Yes

Photometrics @ 25°C

Product Code	Finish	Beam	W	Colour	lm	lm/W	Energy
GL019USS22S	Stainless steel 316	12°	0.4W (150mA)	2200K	41	98	
			0.7W (250mA)	2200K	66	92	
			1W (350mA)	2200K	89	89	
GL019USS27S	Stainless steel 316	12°	0.4W (150mA)	2700K	41	98	
			0.7W (250mA)	2700K	66	92	
			1W (350mA)	2700K	89	89	
GL019USS30S	Stainless steel 316	12°	0.4W (150mA)	3000K	44	105	
			0.7W (250mA)	3000K	71	99	
			1W (350mA)	3000K	95	95	
GL019USS40S	Stainless steel 316	12°	0.4W (150mA)	4000K	49	117	
			0.7W (250mA)	4000K	79	110	
			1W (350mA)	4000K	106	106	
GL019USS22F	Stainless steel 316	38°	0.4W (150mA)	2200K	36	85	
			0.7W (250mA)	2200K	57	79	
			1W (350mA)	2200K	77	77	
GL019USS27F	Stainless steel 316	38°	0.4W (150mA)	2700K	36	85	
			0.7W (250mA)	2700K	57	79	
			1W (350mA)	2700K	77	77	
GL019USS30F	Stainless steel 316	38°	0.4W (150mA)	3000K	38	90	
			0.7W (250mA)	3000K	61	85	
			1W (350mA)	3000K	82	82	
GL019USS40F	Stainless steel 316	38°	0.4W (150mA)	4000K	42	101	
			0.7W (250mA)	4000K	68	94	
			1W (350mA)	4000K	91	91	
GL019UAB22S	Antique brass	12°	0.4W (150mA)	2200K	41	98	
			0.7W (250mA)	2200K	66	92	
			1W (350mA)	2200K	89	89	



WARRANTY

Warranty 7 years

FEATURES & BENEFITS

- Supplied complete with installation tube
- Low voltage ground light
- SDCM3 ensuring uniform light appearance and consistency
- CRI 80 providing true colour appearance
- Available in a new 2200K setting to create a warm and cosy environment with minimal disruption to natural habitat
- Compact yet powerful fitting
- Robust cable for outdoor use
- Available in an array of colours

BEAM ANGLE: 38°

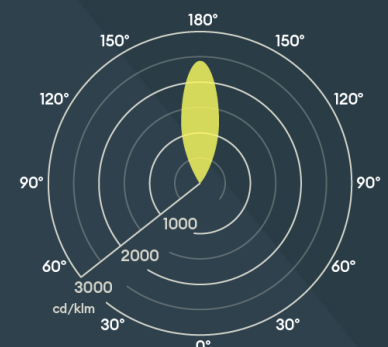

GL019UAB27S	Antique brass	12°	0.4W (150mA)	2700K	41	98	
			0.7W (250mA)	2700K	66	92	
			1W (350mA)	2700K	89	89	
GL019UAB30S	Antique brass	12°	0.4W (150mA)	3000K	44	105	
			0.7W (250mA)	3000K	71	99	
			1W (350mA)	3000K	95	95	
GL019UAB40S	Antique brass	12°	0.4W (150mA)	4000K	49	117	
			0.7W (250mA)	4000K	79	110	
			1W (350mA)	4000K	106	106	
GL019UAB22F	Antique brass	38°	0.4W (150mA)	2200K	36	85	
			0.7W (250mA)	2200K	57	79	
			1W (350mA)	2200K	77	77	
GL019UAB27F	Antique brass	38°	0.4W (150mA)	2700K	36	85	
			0.7W (250mA)	2700K	57	79	
			1W (350mA)	2700K	77	77	
GL019UAB30F	Antique brass	38°	0.4W (150mA)	3000K	38	90	
			0.7W (250mA)	3000K	61	85	
			1W (350mA)	3000K	82	82	
GL019UAB40F	Antique brass	38°	0.4W (150mA)	4000K	42	101	
			0.7W (250mA)	4000K	68	94	
			1W (350mA)	4000K	91	91	
GL019UBK22S	Black	12°	0.4W (150mA)	2200K	41	98	
			0.7W (250mA)	2200K	66	92	
			1W (350mA)	2200K	89	89	
GL019UBK27S	Black	12°	0.4W (150mA)	2700K	41	98	
			0.7W (250mA)	2700K	66	92	
			1W (350mA)	2700K	89	89	
GL019UBK30S	Black	12°	0.4W (150mA)	3000K	44	105	
			0.7W (250mA)	3000K	71	99	
			1W (350mA)	3000K	95	95	
GL019UBK40S	Black	12°	0.4W (150mA)	4000K	49	117	
			0.7W (250mA)	4000K	79	110	
			1W (350mA)	4000K	106	106	
GL019UBK22F	Black	38°	0.4W (150mA)	2200K	36	85	
			0.7W (250mA)	2200K	57	79	
			1W (350mA)	2200K	77	77	
GL019UBK27F	Black	38°	0.4W (150mA)	2700K	36	85	
			0.7W (250mA)	2700K	57	79	
			1W (350mA)	2700K	77	77	
GL019UBK30F	Black	38°	0.4W (150mA)	3000K	38	90	
			0.7W (250mA)	3000K	61	85	
			1W (350mA)	3000K	82	82	
GL019UBK40F	Black	38°	0.4W (150mA)	4000K	42	101	
			0.7W (250mA)	4000K	68	94	
			1W (350mA)	4000K	91	91	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
DRV150700 (all settings)	220-240V	Yes	No	N/A
DRV350700TD (350mA)	220-240V	Yes	Yes	N/A
PSIP35018W	220-240V	Yes	No	1

ACCESSORIES

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately



COLLINGWOOD
LIGHTING

LIGHTING INNOVATION