

LED Battens


LIGHTSPAN Slim II LED Battens

Lightspan Slim II is a range of low profile compact LED battens with a more decorative and elegant design suited to many application from Office to Industry either surface or suspended with a brushed aluminium housing. Variant have CCT and POWER switching plus 3hr Emergency and Sensor options.

- Compact Low Profile elegant design
- Aluminium brushed finish
- Polycarbonate Diffuser provides a soft uniform illumination
- Robust IK10 Construction
- Power and CCT Switchable as Standard
- 3Hour Emergency and Motion Sensor variants



Applications: Perfect for all manner of residential & commercial properties

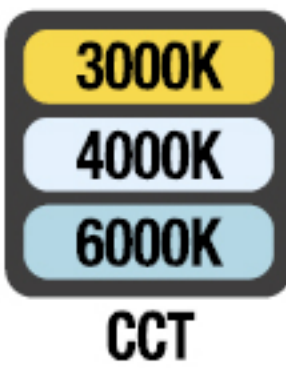

Power switchable - 50% / 75% / 100%, data below is for 100% operation

Product Code	Type	Length ft	Power 100%	IP Rating	Watts W	Total Lumens lm	Efficacy lm/W	Beam Angle	Net Weight kg	Dimensions mm	Pic.
LIGHTSPAN Slim II										25,000 hrs, 3 year warranty	
NEW Non-Dimmable Power and CCT Adjustable											
NEW ILBTF101	PWR Switchable	2	20	IP40	24	2400	120	120°	0.48	590 x 80 x 36	1
NEW ILBTF102	PWR Switchable	4	40	IP40	24	4800	120	120°	0.88	1190 x 80 x 36	2
NEW ILBTF103	PWR Switchable	5	60	IP40	45	7200	120	120°	1.08	1490 x 80 x 36	3
ILBTF104	PWR Switchable	6	72	IP40	45	8640	120	120°	1.35	1790 x 80 x 36	4
NEW Non-Dimmable Power and CCT Adjustable											
ILBTF105	Sensor PWR Switchable	2	20	IP40	45	2400	120	120°	0.48	590 x 80 x 36	1
NEW ILBTF106	Sensor PWR Switchable	4	40	IP40	63	4800	120	120°	0.88	1190 x 80 x 36	2
NEW ILBTF107	Sensor PWR Switchable	5	60	IP40	63	7200	120	120°	1.08	1490 x 80 x 36	3
NEW ILBTF108	Sensor PWR Switchable	6	72	IP40	63	8640	120	120°	1.35	1790 x 80 x 36	4
NEW Non-Dimmable Emergency and CCT Adjustable											
NEW ILBTF110	Emergency	4	40	IP40	75	4800	120	120°	0.88	1190 x 80 x 36	2
NEW ILBTF111	Emergency	5	60	IP40	24	7200	120	120°	1.08	1490 x 80 x 36	3
NEW Non-Dimmable Motion Sensor / Emergency and CCT Adjustable											
NEW ILBTF112	Emergency/Sensor	4	40	IP40	24	4800	120	120°	0.88	1190 x 80 x 36	2
NEW ILBTF113	Emergency/Sensor	5	60	IP40	45	7200	120	120°	1.08	1490 x 80 x 36	3