

ARCHITECTURAL DOWNLIGHTS SPECIFICATION SHEET



**COLLINGWOOD
LIGHTING**

01604 495 151
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

DL120

Mini adjustable LED spot light

FEATURES

IP rating	IP20
Colour flexibility	Fixed colour
Tilttable	20°
Input	350mA
LED Lifetime	70,000h L70 B10
CRI	>70Ra or >80Ra
SDCM	3SDCM
Emergency version available	Yes

INSTALLATION INFORMATION

Install Connector Type	Plug and Play
Insulation Coverable	No
Cut Out Size	Ø 44mm
Bathroom zone	1
Construction Material	Aluminium
Maximum ceiling thickness	25mm
Weight	140g
Maximum ambient temperature	35°C
Electric Class (1, 2, 3)	3

GUARANTEE / WARRANTY

1 year extended warranty

FEATURES & BENEFITS

Small and discreet adjustable LED spot lights

High quality machined aluminium

Easy plug and play installation

PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
DL120 NW	Silver Anodised	1W	4000K	15°	82	82	703
DL120 WW	Silver Anodised	1W	3000K	15°	69	69	591
DL120 27	Silver Anodised	1W	2700K	15°	67	67	574

WIRING INFORMATION

Cable / Flying Lead	300mm (0.205mm ² red & black PTFE)
Type of Wiring Required	Series


LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PLU/PP/350 1-9 (Plug & Play)	N/A	SELV	No	N/A	1	9
PLR/350 1-5	N/A	Yes	No	-	1	5
PLD UNI-DRIVE 350mA	N/A	Yes	Yes (1-10V)	-	1	10

ACCESSORIES

LED LYTE 1M EXT	1m Plug & Play extension lead
LED LYTE 6 WAY EXT	6 way 1m Plug & Play extension lead
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types
DM298GRID	LED mains grid dimmer
DM298FP	Faceplate dimmer

Beam angle: 15°

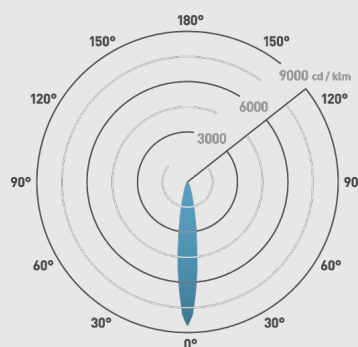

Ø51.5mm

