






01604 495 151
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

GL019 Ultra low glare

1W, 78lm mini ground light

Features

IK rating	IK07
IP rating	IP68
CSP Switchable	Fixed colour
UGR	<10
Walk Over / Drive Over	Walk over
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

Installation information

Cut Out Size	Ø 33mm
UK Bathroom Zone	0
Construction Material	Stainless steel (316)
Weight	260g
Maximum Ambient Temperature	50°C
Electric Class (1, 2, 3)	3

Guarantee

7 year extended warranty

Features & benefits

- 1W at 350mA
- Baffled for low glare and visual comfort
- Low voltage groundlight
- Perfect for both interior and exterior applications
- Compliments environments with ultra low glare up-lighting effect
- Marine-grade stainless steel 316

Photometrics @ 25°C


Product code	W	Colour	Beam	lm	lm/W	lx @ 1m
GL019DMBL40	1W	4000K	30°	68	68	2222
GL019DNBL40	1W	4000K	12°	78	78	2369
GL019DMBL30	1W	3000K	30°	64	64	25
GL019DNBL30	1W	3000K	12°	74	74	1324
GL019DMBL27	1W	2700K	30°	60	60	24
GL019DNBL27	1W	2700K	12°	70	70	1292
GL019BMBL27	1W	2700K	30°	60	60	24
GL019BMBL30	1W	3000K	30°	64	64	25
GL019BMBL40	1W	4000K	30°	68	68	125
GL019BNBL27	1W	2700K	12°	70	70	1292
GL019BNBL30	1W	3000K	12°	74	74	1324
GL019BNBL40	1W	4000K	12°	78	78	2369
GL019AMBL27	1W	2700K	30°	60	60	161
GL019AMBL30	1W	3000K	30°	64	64	172
GL019ANBL27	1W	2700K	12°	70	70	1203
GL019ANBL30	1W	3000K	12°	74	74	1272



Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/350 1-9	220-240V	Yes	No	1	1	9
PLR/350 1-5	N/A	Yes	No	0	1	5
PLD UNI-DRIVE 350MA	N/A	Yes	Yes (1-10V)	2	1	10

Light source energy efficiency: 

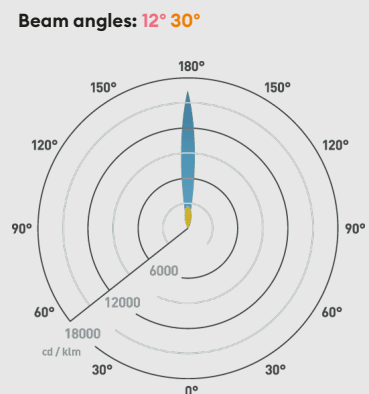


Accessories


JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

 [collingwoodled](#)

 [/collingwoodlighting](#)

 [collingwoodlighting](#)

GL019 Ultra low glare

This ultra low-glare, IP68 ground light is a stunning product for illuminating entrance halls, pathways and circulation areas of both interiors and exteriors. The light source is recessed further back into the ground keeping it hidden from view, but still provides a powerful upwards light beam. This marine-grade stainless steel unit will give a flawless performance for many years of maintenance-free operation. Available in three colour temperatures and two beam angles, this product will suit any interior or exterior design.