




GROUND LIGHTS SPECIFICATION SHEET



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

-  @collingwoodLED
-  /collingwoodlighting
-  collingwoodled

GL019 S TK

1W mini LED ground light threaded kit

FEATURES

Wattage	1W (350mA) 2W (700mA)
IP rating	IP68
IK rating	IK07
Colour flexibility	Fixed colour
Walk Over / Drive Over	Walk over (5mm toughened glass)
Input	350mA / 700mA
LED Lifetime	70,000h L70 B10
SDCM	3SDCM

INSTALLATION INFORMATION

Cut Out Size	Ø 37mm
Bathroom zone	0
Construction Material	Stainless steel (316)
Weight	304g
Maximum ambient temperature	50°C

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

New - can now also be used with a 700mA driver for increased light output (see page 282 for driver matrix)

Theft/vandal-proof. Threaded body fits securely into supplied aluminium tube using tightening key

Aluminium tube for secure installation in concrete or soft ground environments

Low profile waterproof ground light. Ideal for decking or by swimming pools

PHOTOMETRICS @ 25°C

Partcode	Colour	Beam angle	350mA			700mA		
			lm	lm/W	lx @ 1m	lm	lm/W	lx @ 1m
GL019 S TK NW	4000K	12°	90	90	1833	130	65	2648
GL019 S TK 27	2700K	12°	70	70	1425	115	58	2341
GL019 S TK BLUE	Blue	12°	10	10	204	20	10	407

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series


LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	220-240V	Yes	No	1	1	9
PLD UNI-DRIVE 350MA	N/A	Yes	Yes (1-10V)	2	1	10
PLU/700 3-9	N/A	Yes	No	1	3	9


ACCESSORIES


JB2 / JB4 / JB6	IP68 waterproof connectors
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types

Beam angle: 12°

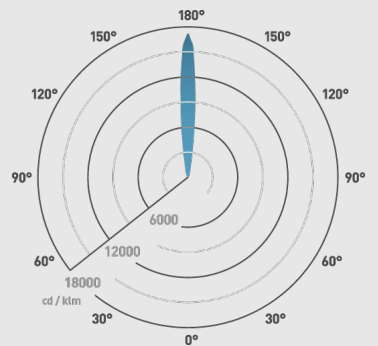

Ø40/37mm




 This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

A+
A
A
C
D
E

LED

 874/2012