

Ground lights specification sheet



GL038

2.9W, 300lm ground light

Features

IK rating	IK08
IP rating	IP65
CSP Switchable	Fixed colour
Walk Over / Drive Over	Walk over
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM
Driver Rated Wattage	4W

Installation information

Cut Out Size	Ø 80-85mm
UK Bathroom Zone	2
Inrush Current	60A 0.037ms
Construction Material	Stainless steel 316 (top) / aluminium (body)
Weight	696g
Maximum Ambient Temperature	35°C
SELV	Yes
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	W	Colour	Beam	lm	lm/W	lx @ 1m
GL038DWBM27	2.9W	2700K	40°	280	96	526
GL038DWBM30	2.9W	3000K	40°	290	100	544
GL038DWBM40	2.9W	4000K	40°	300	103	563
GL038AWBM27	2.9W	2700K	40°	280	96	526
GL038AWBM30	2.9W	3000K	40°	290	100	544

Wiring information

Cable / Flying Lead	1m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED driver

N/A (integrated SELV driver)	220-240V	Yes	No	2	N/A	N/A
------------------------------	----------	-----	----	---	-----	-----

Accessories

Installation Tube	For easy ground installation	Included
JB5	Gel filled waterproof connector	Sold Separately
WC 5-9	Quick waterproof connector	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

7 year extended warranty

Features & benefits

Coastal protected

Mains voltage groundlight

Single LED and lens combination for maximum efficiency and optimal light distribution

Marine grade stainless steel 316 or antique brass


Long lifetime of 70,000hrs

7 year warranty

Light source energy efficiency:



Beam angle: 40°

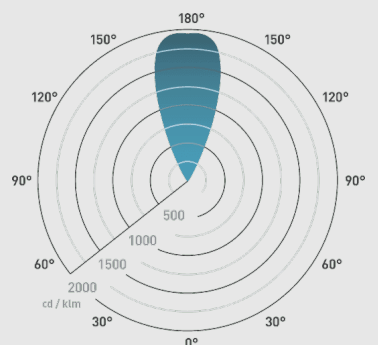

Ø98mm

