



GROUND LIGHTS SPECIFICATION SHEET




**COLLINGWOOD
LIGHTING**

01604 495 151
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

GL038

2.9W, 300lm ground light

FEATURES

| | |
|------------------------|---------------------------------|
| IK rating | IK08 |
| IP rating | IP67 |
| Colour flexibility | Fixed colour |
| Walk Over / Drive Over | Walk over (5mm toughened glass) |
| Input | 220-240V 50/60Hz |
| LED Lifetime | 70,000h L70 B10 |
| CRI | >80Ra |
| SDCM | 3SDCM |
| Wattage | 4W |

INSTALLATION INFORMATION

| | |
|-----------------------------|--|
| Cut Out Size | Ø 80-85mm |
| Bathroom zone | 2 |
| Inrush Current | 60A 0.037ms |
| Construction Material | Stainless Steel 316 (top) / Aluminium (body) |
| Weight | 696g |
| Maximum ambient temperature | 35°C |
| SELV | Yes |
| Electric Class (1, 2, 3) | 1 |

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

Single LED and lens combination for maximum efficiency and optimal light distribution.

Straight to mains

Marine grade stainless steel 316

Long lifetime of 70,000hrs

7 year warranty

PHOTOMETRICS @ 25°C

| Product code | Wattage | Colour | Beam angle | lm | lm/W | lx @ 1m |
|--------------|---------|--------|------------|-----|------|---------|
| GL038DWBM27 | 2.9W | 2700K | 40° | 280 | 96 | 526 |
| GL038DWBM30 | 2.9W | 3000K | 40° | 290 | 100 | 544 |
| GL038DWBM40 | 2.9W | 4000K | 40° | 300 | 103 | 563 |

WIRING INFORMATION

| | |
|-------------------------|---|
| Cable / Flying Lead | 1m H05RN-F rubberised cable (outside diameter: 7mm) |
| Type of Wiring Required | Parallel |


LED DRIVER

| Product code | Input | SELV | Dimming | Bathroom zone | Min | Max |
|------------------------------|----------|------|---------|---------------|-----|-----|
| N/A (integrated SELV driver) | 220-240V | Yes | No | 2 | N/A | N/A |

ACCESSORIES

| | |
|------------------------------|--|
| Installation tube (included) | |
| JB5 | |
| WC 5-9 | |

Beam angle:

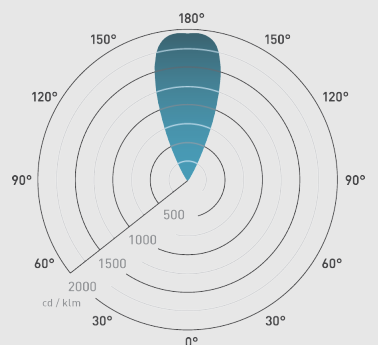

Ø98mm

