

GROUND LIGHTS SPECIFICATION SHEET



GL07

8.5W, 695lm drive over LED ground light

FEATURES

IK rating	IK10
IP rating	IP67
Colour flexibility	Fixed colour
Tilttable	20°
Walk Over / Drive Over	Drive over (15mph maximum)
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	0.92A 0.13ms
Efficiency	74.11
Construction Material	Stainless Steel 316 (cover ring) / Aluminium (body)
Weight	2.8Kg
Maximum ambient temperature	40°C
SELV	Yes
Electric Class [1, 2, 3]	1

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
GL07D60X40	8.5W	4000K	60°	695	82	550
GL07D38X40	8.5W	4000K	38°	695	82	1620
GL07D24X40	8.5W	4000K	24°	695	82	2198
GL07D60X30	8.5W	3000K	60°	695	82	550
GL07D38X30	8.5W	3000K	38°	695	82	1620
GL07D24X30	8.5W	3000K	24°	695	82	2198
GL07D60X27	8.5W	2700K	60°	685	81	542
GL07D38X27	8.5W	2700K	38°	685	81	1596
GL07D24X27	8.5W	2700K	24°	685	81	2167

WIRING INFORMATION

Cable / Flying Lead	1m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (driver built in)	220-240V	-	No	2	-	-

ACCESSORIES

Installation tube (included)	
JB5	Gel filled waterproof connector
WC 5-9	Quick waterproof connector



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled


GUARANTEE / WARRANTY

5 year extended warranty

FEATURES & BENEFITS

- Adjustable LED fittings
- High light output of 695 lumens
- Robust cable for outdoor use
- Straight to mains
- Installation tube included
- 10mm toughened glass, ideal for use in driveways

Beam angles: 24° 38° 60°

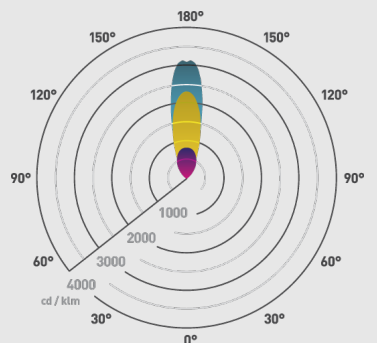

Ø185/180mm

