



GROUND LIGHTS SPECIFICATION SHEET




**COLLINGWOOD
LIGHTING**

01604 495 151
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

GL09

25W, 2,000lm+ drive over ground light

FEATURES

IK rating	IK10
IP rating	IP67
Colour flexibility	Fixed colour
Tilttable	20°
Walk Over / Drive Over	Drive over (15mph maximum)
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	2.8A 0.2ms
Construction Material	Stainless Steel 316 (cover ring) / Aluminium (body)
Weight	7.51Kg
Maximum ambient temperature	40°C
SELV	Yes
Electric Class (1, 2, 3)	1

GUARANTEE / WARRANTY

5 year extended warranty

FEATURES & BENEFITS

- Adjustable LED fittings
- High light output of 2085 lumens
- Straight to mains
- Robust cable for outdoor use
- Installation tube included
- 10mm toughened glass, ideal for use in driveways

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
GL09D60X40	25.5W	4000K	60°	2085	82	1266
GL09D38X40	25.5W	4000K	38°	2085	82	3453
GL09D24X40	25.5W	4000K	24°	2085	82	5471
GL09D60X30	25.5W	3000K	60°	2085	82	1253
GL09D38X30	25.5W	3000K	38°	2085	82	3419
GL09D24X30	25.5W	3000K	24°	2085	82	5417
GL09D60X27	25.5W	2700K	60°	2040	80	1220
GL09D38X27	25.5W	2700K	38°	2040	80	3327
GL09D24X27	25.5W	2700K	24°	2040	80	5272

WIRING INFORMATION

Cable / Flying Lead	1m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel


LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (driver built in)	220-240V	-	No	2	-	-

ACCESSORIES

Installation tube (included)	
JB5	Gel filled waterproof connector
WC 5-9	Quick waterproof connector

Beam angles: 24° 38° 60°

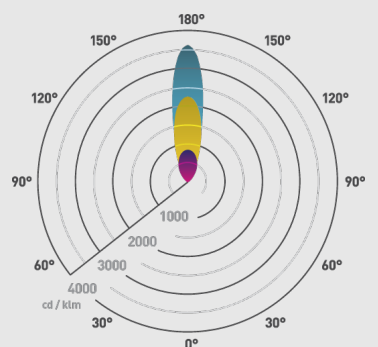

Ø300/290mm

