



01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Tilt Adjustable Ground Light

Straight to Mains, TRIAC mains dimmable

Guarantee

5 years

Features

IK Rating	IK08
IP Rating	IP67
CSP Switchable	Single CCT
Tiltable	25°
Walk Over / Drive Over	Drive over (15mph maximum)
LED Lifetime	L70 50,000h
CRI	CRI>80
SDCM	SDCM3

Installation information

Cut Out Size	119/147/165/193/223 mm
UK Bathroom Zone	2
Inrush Current	GLTM_11: 0.5A 0.4ms, GLTM_14: 0.6A 0.4ms, GLTM_16: 0.45A 0.5ms, GLTM_19: 0.55A 0.5ms, GLTM_22: 0.55A 0.5ms
Construction Material	Anodised aluminium body, 316 SS bezel
Weight	GLTM_11: 0.99kg, GLTM_14: 1.56kg, GLTM_16: 2.03kg, GLTM_19: 3.26kg, GLTM_22: 3.98kg
Ambient Temperature Range	-25°C - 40°C
Electric Class (1, 2, 3)	1

Features & benefits

IP67 for complete protection against ingress of dust & water

IK08 (GLTM_11/14) IK10 (GLTM_16/19/22)

Suitable for coastal applications

Tilt angle of luminaire is adjustable, just turn knob to tilt the light distribution up to 25 degrees

Static loading capacity is 2000kg

Pre-wired with 1 meter of cable to aid the installer


DALI-2 dimmable and RGBW options also available

Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	W	Colour	Beam	lm	lm/W
GLTMS119T30	Stainless steel 316	119mm cut-out	IK08	6W	3000K	34°	450	75
GLTMS147T30	Stainless steel 316	147mm cut-out	IK08	12W	3000K	34°	1200	100
GLTMF147T30	Stainless steel 316	147mm cut-out	IK08	12W	3000K	60°	1200	100
GLTMS165T30	Stainless steel 316	165mm cut-out	IK10	18W	3000K	34°	1600	89
GLTMF165T30	Stainless steel 316	165mm cut-out	IK10	18W	3000K	60°	1600	89
GLTMS193T30	Stainless steel 316	193mm cut-out	IK10	23W	3000K	34°	2300	100
GLTMS223T30	Stainless steel 316	223mm cut-out	IK10	30W	3000K	34°	3300	100



Beam angle: 34°

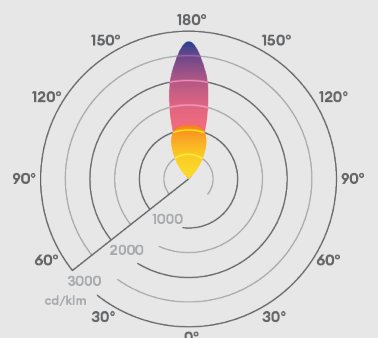

Wiring information

Cable / Flying Lead	Pre-wired 1.0M H05RN-F, 3x1.0mm2
Type of Wiring Required	Parallel

Accessories

DM298FP	Faceplate rotary mains dimmer	Sold Separately
DM298GRID	Grid rotary mains dimmer	Sold Separately
JB5	Gel filled waterproof connector	Sold Separately

