

**LIGHTSPAN T8 BATTEN 4FT SINGLE STANDARD 2800LM 22W 130LM/W
4000K 120 BEAM 1170MM LINKABLE NON-DIMM INTEGRAL**

ILBTC111



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

Details

Quick Order Code:	492843
Barcode:	5055788251248
Category:	Luminaires
Range Name:	Lightspan
Type:	Single
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1170
Product Depth (mm):	70
Product Width (mm):	60
Product Weight (g):	1700
Optic:	Polycarbonate diffuser
Material:	Polycarbonate, Aluminium
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Wall / Ceiling / Pendant / Conduit mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	22
Power Factor:	0.9


Wattage equivalent (W):	36
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	2600
Luminous efficacy (lm/W):	130
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	30000
Useful Lumens (lm):	2600

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK06
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	50

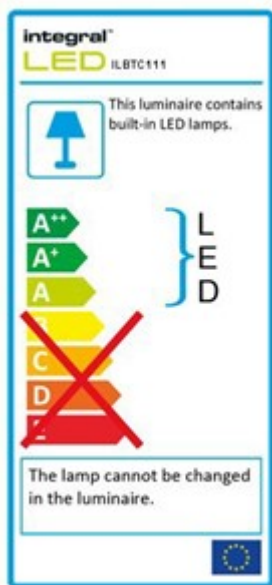

Packaging

Portal.integral-led.com

Package Weight (g):	1800
----------------------------	------

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	1175
Package Width (mm):	68
Package Depth (mm):	79

**LIGHTSPAN T8 BATTEN 5FT SINGLE STANDARD 3900LM 30W 130LM/W
4000K 120 BEAM 1470MM LINKABLE NON-DIMM INTEGRAL**

ILBTC113



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

Details

Quick Order Code:	922935
Barcode:	5055788251262
Category:	Luminaires
Range Name:	Lightspan
Type:	Single
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1470
Product Depth (mm):	70
Product Width (mm):	60
Product Weight (g):	2100
Optic:	Polycarbonate diffuser
Material:	Polycarbonate, Aluminium
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Wall / Ceiling / Pendant / Conduit mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	30
Power Factor:	0.9


Wattage equivalent (W):	58
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	3600
Luminous efficacy (lm/W):	130
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	30000
Useful Lumens (lm):	3600

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK06
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	50

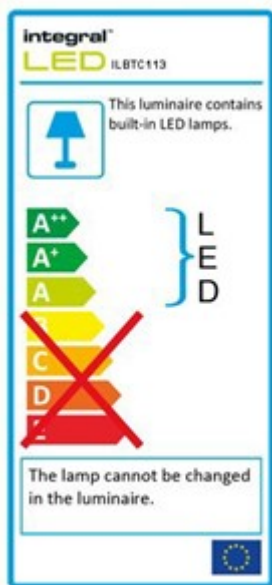

Packaging

Portal.integral-led.com

Package Weight (g):	2220
----------------------------	------

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	1475
Package Width (mm):	68
Package Depth (mm):	79

**LIGHTSPAN T8 BATTEN 6FT SINGLE STANDARD 5200LM 40W 130LM/W
4000K 120 BEAM 1734MM LINKABLE NON-DIMM INTEGRAL**

ILBTC115



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

Details

Quick Order Code:	85198
Barcode:	5055788251286
Category:	Luminaires
Range Name:	Lightspan
Type:	Single
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1734
Product Depth (mm):	70
Product Width (mm):	60
Product Weight (g):	2400
Optic:	Polycarbonate diffuser
Material:	Polycarbonate, Aluminium
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Wall / Ceiling / Pendant / Conduit mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	40
Power Factor:	0.9


Wattage equivalent (W):	70
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	5200
Luminous efficacy (lm/W):	130
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	30000
Useful Lumens (lm):	5200

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK06
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	50

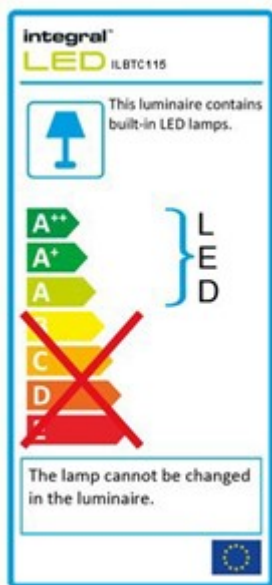

Packaging

Portal.integral-led.com

Package Weight (g):	2550
----------------------------	------

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	1735
Package Width (mm):	68
Package Depth (mm):	79

**LIGHTSPAN T8 BATTEN 4FT TWIN 5600LM 43W 130LM/W 4000K 120 BEAM
1170mm LINKABLE NON-DIMM INTEGRAL**

ILBTC051



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

Details

Quick Order Code:	697540
Barcode:	5055788237006
Category:	Luminaires
Range Name:	Lightspan
Type:	Twin
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1170
Product Depth (mm):	70
Product Width (mm):	60
Product Weight (g):	1250
Optic:	Polycarbonate diffuser
Material:	Polycarbonate, Aluminium
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Wall / Ceiling / Pendant / Conduit mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	43
Power Factor:	0.9


Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	5600
Luminous efficacy (lm/W):	130
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	30000
Useful Lumens (lm):	5150

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	50

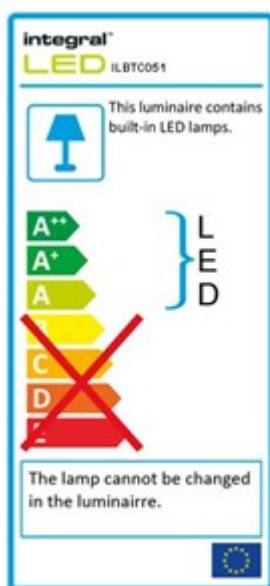

Packaging

Package Weight (g):	1450	Portal.integral-led.com
Package Length (mm):	1175	

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm):	68
Package Depth (mm):	79

**LIGHTSPAN T8 BATTEN 5FT TWIN STANDARD 7800LM 60W 130LM/W 4000K
120 BEAM 1470MM LINKABLE NON-DIMM INTEGRAL**

ILBTC053



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

Details

Quick Order Code:	850477
Barcode:	5055788237037
Category:	Luminaires
Range Name:	Lightspan
Type:	Twin
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1470
Product Depth (mm):	70
Product Width (mm):	60
Product Weight (g):	1600
Optic:	Polycarbonate diffuser
Material:	Polycarbonate, Aluminium
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Wall / Ceiling / Pendant / Conduit mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	60
Power Factor:	0.9


Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	7800
Luminous efficacy (lm/W):	130
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	30000
Useful Lumens (lm):	7200

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	50

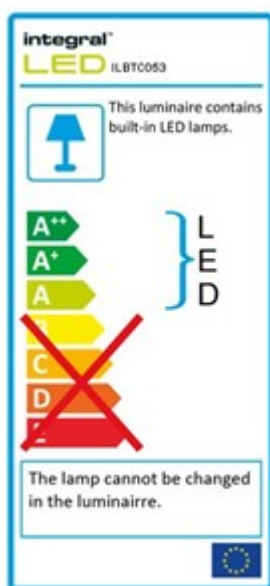

Packaging

Package Weight (g):	1650	Portal.integral-led.com
Package Length (mm):	1475	

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm):	68
Package Depth (mm):	79

**LIGHTSPAN T8 BATTEN 6FT TWIN STANDARD 8400LM 65W 130LM/W 4000K
120 BEAM 1734MM LINKABLE NON-DIMM INTEGRAL**

ILBTC055



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

Details

Quick Order Code:	356634
Barcode:	5055788237068
Category:	Luminaires
Range Name:	Lightspan
Type:	Twin
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1734
Product Depth (mm):	70
Product Width (mm):	60
Product Weight (g):	1900
Optic:	Polycarbonate diffuser
Material:	Polycarbonate, Aluminium
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Wall / Ceiling / Pendant / Conduit mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	65
Power Factor:	0.9


Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	8400
Luminous efficacy (lm/W):	130
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	30000
Useful Lumens (lm):	8400

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	50

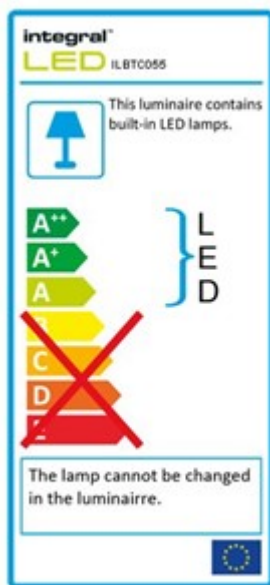

Packaging

Package Weight (g):	2200	Portal.integral-led.com
Package Length (mm):	1742	

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm):	68
Package Depth (mm):	79