

**CANDLE BULB B22 250LM 3.4W 2700K NON-DIMM 240 BEAM CLEAR  
INTEGRAL**

ILCANDB22NC011



This 3.4W retro-fit Integral LED Candle (clear finish, large bayonet, white base) delivers a warm light and brightness, similar to a 25W filament bulb. It features high output LEDs and an anti-glare lens. Ideal for living rooms, dining rooms, bedrooms and hotels, in classic or modern wall or floor/table lamp fittings and chandeliers.

**Details**

<b>Quick Order Code:</b>	960285
<b>Barcode:</b>	5055788207795
<b>Category:</b>	Lamps
<b>Range Name:</b>	Everyday
<b>Product Type:</b>	Candle
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	97
<b>Product Width (mm):</b>	35
<b>Product Weight (g):</b>	37
<b>Material:</b>	Plastic, Polycarbonate, Nickel plated brass
<b>Base Term:</b>	Bayonet cap
<b>Bulb Base:</b>	B22
<b>Construction:</b>	Aluminium and Plastic heat-sink, Injection moulded diffuser
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	Candle
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	3.4
<b>Power Consumption (w):</b>	3.4
<b>Power Factor:</b>	0.5
<b>Wattage equivalent (W):</b>	25


<b>Amperage (mA):</b>	37
<b>Dimming:</b>	Non-Dimmable
<b>Driver IC Manufacturer:</b>	Silergy
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	250
<b>Luminous efficacy (lm/W):</b>	74
<b>Correlated Colour Temperature (CCT) (K):</b>	2700
<b>Colour Temperature:</b>	2700K - Warm
<b>Colour Temperature Name:</b>	Warm
<b>Beam Angle:</b>	240
<b>Colour Rendering Index (CRI):</b>	80
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Surface mounted device (SMD)
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	12500

## Environment

<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>Energy Rating:</b>	A+
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	40

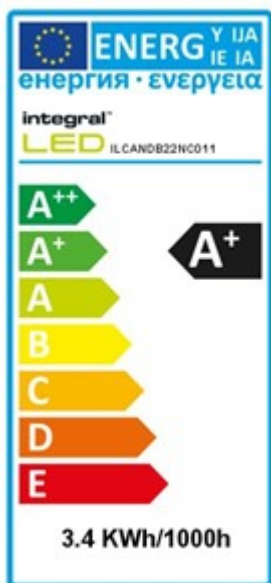

## Packaging

<b>Package Weight (g):</b>	61
<b>Package Length (mm):</b>	115

[Portal.integral-led.com](http://Portal.integral-led.com)

<b>Package Width (mm):</b>	48
<b>Package Depth (mm):</b>	48
<b>Qty per euro pallet:</b>	1800

**CANDLE BULB B22 470LM 5.5W 2700K NON-DIMM 280 BEAM CLEAR  
INTEGRAL**

ILCANDB22NC022

**Details**

<b>Quick Order Code:</b>	643664
<b>Barcode:</b>	5055788207856
<b>Category:</b>	Lamps
<b>Range Name:</b>	Everyday
<b>Product Type:</b>	Candle
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	109
<b>Product Width (mm):</b>	38
<b>Product Weight (g):</b>	75
<b>Material:</b>	Plastic, Polycarbonate, Nickel plated brass
<b>Base Term:</b>	Bayonet cap
<b>Bulb Base:</b>	B22
<b>Construction:</b>	Aluminium and Plastic heat-sink, Injection moulded diffuser
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	Candle
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	5.5
<b>Power Consumption (w):</b>	5.5
<b>Power Factor:</b>	0.5
<b>Wattage equivalent (W):</b>	40
<b>Amperage (mA):</b>	55
<b>Dimming:</b>	Non-Dimmable
<b>Driver IC Manufacturer:</b>	Silergy
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC


EN: EN-62560  
LVD Certified: Yes

## Light Data

Luminous Flux in Lumens (lm): 470  
Luminous efficacy (lm/W): 85  
Correlated Colour Temperature (CCT) (K): 2700  
Colour Temperature: 2700K - Warm  
Colour Temperature Name: Warm  
Beam Angle: 280  
Colour Rendering Index (CRI): 80  
Instant on (Less than 1 second): Yes  
LED Type: Surface mounted device (SMD)  
Lifetime (hours): 15000  
Switching Cycles: 12500

## Environment

EN: EN-62560  
LVD Certified: Yes  
CE RoHS: Yes  
Energy Rating: A+  
Hg 0% (Mercury Free): Yes  
IP Rating (Ingress Protection): IP20  
Lowest Operating Temperature (°C): -20  
Maximum Operating Temperature (°C): 40

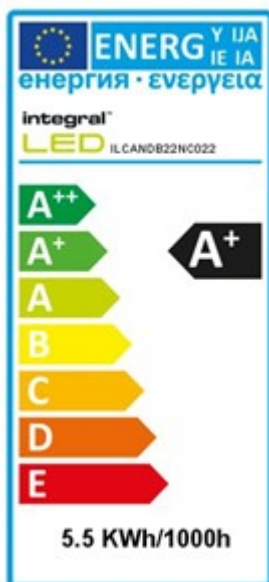

## Packaging

Package Weight (g): 100  
Package Length (mm): 125  
Package Width (mm): 48  
Package Depth (mm): 48  
Qty per euro pallet: 1600

[Portal.integral-led.com](http://Portal.integral-led.com)