

CANDLE BULB B22 250LM 3.4W 2700K NON-DIMM 260 BEAM FROSTED INTEGRAL

ILCANDB22NC008



This 3.4W retro-fit Integral LED Candle (frosted finish, large bayonet, white base) delivers a warm light and brightness, similar to a 25W filament bulb. It features high output LEDs and an anti-glare refractor. Ideal for living rooms, dining rooms, bedrooms and hotels, in classic or modern wall or floor/table lamp fittings and chandeliers.

Details

Quick Order Code:	444364
Barcode:	5055788209942
Category:	Lamps
Range Name:	Everyday
Product Type:	Candle
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	99
Product Width (mm):	35
Product Weight (g):	40
Material:	Plastic, Polycarbonate, Nickel plated brass
Base Term:	Bayonet cap
Bulb Base:	B22
Construction:	Aluminium and Plastic heat-sink, Injection moulded diffuser
Globe Finish:	Frosted
Globe Type:	Candle
Bulb Fixing:	Pendant, Chandelier, Wall
Bulb or Luminaire Shape:	Oval

Electrical Data

Power Consumption (w):	3.4
Power Factor:	0.5
Wattage equivalent (W):	25
Amperage (mA):	33

Dimming:	Non-Dimmable
Driver IC Manufacturer:	Silergy
Driver Included:	Yes
Electric Current:	AC
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	250
Luminous efficacy (lm/W):	74
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature Name:	Warm
Beam Angle:	260
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	12500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A+
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

Packaging

Package Weight (g):	64
Package Length (mm):	115
Package Width (mm):	48
Package Depth (mm):	48
Qty per euro pallet:	1600

CANDLE BULB B22 470LM 5.5W 2700K NON-DIMM 280 BEAM FROSTED INTEGRAL

ILCANDB22NC016



This 5.5W retro-fit Integral LED Candle (frosted finish, large bayonet, white base) delivers a warm light and brightness, similar to a 40W filament bulb. It features high output LEDs and an anti-glare refractor. Ideal for living rooms, dining rooms, bedrooms and hotels, in classic or modern wall or floor/table lamp fittings and chandeliers.

Details

Quick Order Code:	931621
Barcode:	5055788207825
Category:	Lamps
Range Name:	Everyday
Product Type:	Candle
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	109
Product Width (mm):	38
Product Weight (g):	70
Material:	Plastic, Polycarbonate, Nickel plated brass
Base Term:	Bayonet cap
Bulb Base:	B22
Construction:	Aluminium and Plastic heat-sink, Injection moulded diffuser
Globe Finish:	Frosted
Globe Type:	Candle
Bulb or Luminaire Shape:	Oval
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	5.5
Power Consumption (w):	5.5
Power Factor:	0.5
Wattage equivalent (W):	40


Amperage (mA):	54
Dimming:	Non-Dimmable
Driver IC Manufacturer:	Silergy
Driver Included:	Yes
Electric Current:	AC
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	470
Luminous efficacy (lm/W):	85
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	280
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	7500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A+
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

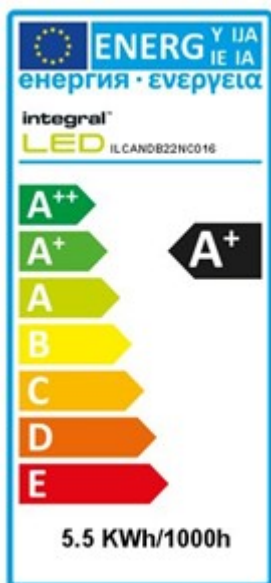

Packaging

Package Weight (g):	95
Package Length (mm):	125

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm):	48
Package Depth (mm):	48
Qty per euro pallet:	1600