

**OMNI FILAMENT CANDLE BULB B22 250LM 2.0W 2700K NON-DIMM 300 BEAM INTEGRAL**

ILCANDB22NC002



This cutting edge A++, 2W retro-fit Integral LED Candle (large bayonet base) from the Omni-Lamp range delivers a warm white light and brightness, similar to a 25W filament bulb. It has the appearance, feel and weight of a traditional light bulb. Featuring an LED filament, which enables a super-wide 300 degree beam angle. A decorative lamp ideal for living rooms, dining rooms, bedrooms and hotels, in classic or modern wall or floor/table lamp fittings and chandeliers.

**Details**

<b>Quick Order Code:</b>	544935
<b>Barcode:</b>	5055788210894
<b>Category:</b>	Lamps
<b>Range Name:</b>	Omni
<b>Product Type:</b>	Candle
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	93
<b>Product Width (mm):</b>	35
<b>Product Weight (g):</b>	13
<b>Material:</b>	Glass
<b>Base Term:</b>	Bayonet cap
<b>Bulb Base:</b>	B22
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	Candle
<b>Bulb Fixing:</b>	Pendant, Chandelier, Wall
<b>Bulb or Luminaire Shape:</b>	Oval

**Electrical Data**

<b>Power (W):</b>	2
<b>Power Consumption (w):</b>	2
<b>Power Factor:</b>	0.45
<b>Wattage equivalent (W):</b>	25
<b>Amperage (mA):</b>	19


<b>Dimming:</b>	Non-Dimmable
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	250
<b>Luminous efficacy (lm/W):</b>	125
<b>Correlated Colour Temperature (CCT) (K):</b>	2700
<b>Colour Temperature:</b>	2700K - Warm
<b>Colour Temperature Name:</b>	Warm
<b>Beam Angle:</b>	300
<b>Colour Rendering Index (CRI):</b>	80
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Filament chip
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	7500

## Environment

<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>Energy Rating:</b>	A++
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	40

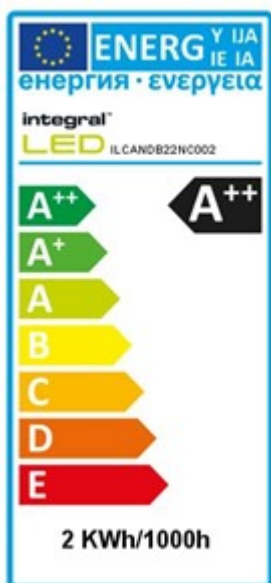

## Packaging

<b>Package Weight (g):</b>	28
<b>Package Length (mm):</b>	120
<b>Package Width (mm):</b>	40
<b>Package Depth (mm):</b>	40

[Portal.integral-led.com](http://Portal.integral-led.com)

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

**Qty per euro pallet:**

2800

**[Portal.integral-led.com](http://Portal.integral-led.com)**

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

**OMNI FILAMENT CANDLE BULB B22 470LM 4W 2700K NON-DIMM 300 BEAM CLEAR INTEGRAL**

ILCANDB22NC035



Integral Filament Omni Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in chandeliers and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

**Details**

<b>Quick Order Code:</b>	820080
<b>Barcode:</b>	5055788215394
<b>Category:</b>	Lamps
<b>Range Name:</b>	Omni
<b>Product Type:</b>	Candle
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	90.5
<b>Product Width (mm):</b>	35
<b>Product Weight (g):</b>	19
<b>Material:</b>	Aluminium, Glass
<b>Base Term:</b>	Bayonet cap
<b>Bulb Base:</b>	B22
<b>Construction:</b>	Glass shell, Filament strip, Aluminium base
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	Candle
<b>Bulb Fixing:</b>	Pendant, Wall, lamp stand, table lamp
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	4
<b>Power Consumption (w):</b>	4
<b>Power Factor:</b>	0.4
<b>Wattage equivalent (W):</b>	36, 40


<b>Amperage (mA):</b>	34
<b>Dimming:</b>	Non-Dimmable
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	420, 470
<b>Luminous efficacy (lm/W):</b>	118
<b>Correlated Colour Temperature (CCT) (K):</b>	2700
<b>Colour Temperature:</b>	2700K - Warm
<b>Colour Temperature Name:</b>	Warm
<b>Beam Angle:</b>	300, 330
<b>Colour Rendering Index (CRI):</b>	80
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Filament chip
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	7500

## Environment

<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>Energy Rating:</b>	A++
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	40

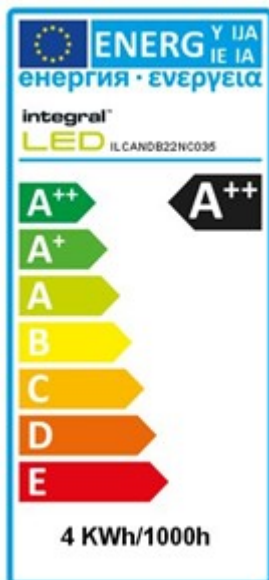

## Packaging

<b>Package Weight (g):</b>	69
<b>Package Length (mm):</b>	106
<b>Package Width (mm):</b>	42

[Portal.integral-led.com](http://Portal.integral-led.com)

**Package Depth (mm):**

**42**