

**CLASSIC FILAMENT CANDLE BULB E14 250LM 2.2W 2700K NON-DIMM 300
BEAM FROSTED INTEGRAL**

ILCANDE14NC060



The Classic Full Glass Frosted lamp utilises Filament LED technology to create a decorative look perfect for fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Details

| | |
|--------------------------|---------------------------------------|
| Quick Order Code: | 105230 |
| Barcode: | 5055788254669 |
| Category: | Lamps |
| Range Name: | Classic |
| Market Segment: | Commercial indoor, Residential indoor |
| Warranty (Years): | 2 |
| CE RoHS: | Yes |

Physical Data

| | |
|---------------------------------|---|
| Product Length (mm): | 98 |
| Product Width (mm): | 35 |
| Product Weight (g): | 18 |
| Material: | Aluminium, Glass |
| Base Term: | Small Edison screw |
| Bulb Base: | E14 |
| Construction: | Glass shell, Filament strip, Aluminium base |
| Globe Finish: | Frosted |
| Globe Type: | Candle |
| Bulb or Luminaire Shape: | Oval |
| Placement / Application: | Indoor, General Lighting |

Electrical Data

| | |
|--------------------------------|--------------|
| Power Consumption (w): | 2.2 |
| Power Factor: | 0.4 |
| Wattage equivalent (W): | 22 |
| Amperage (mA): | 22 |
| Dimming: | Non-Dimmable |
| Driver Included: | Yes |


| | |
|----------------------|----------|
| Electric Current: | AC |
| True Wattage Eq (W): | 22 |
| EN: | EN-62560 |
| LVD Certified: | Yes |

Light Data

| | |
|--|---------------|
| Luminous Flux in Lumens (lm): | 250 |
| Luminous efficacy (lm/W): | 114 |
| Correlated Colour Temperature (CCT) (K): | 2700 |
| Colour Temperature: | 2700K - Warm |
| Colour Temperature Name: | Warm |
| Beam Angle: | 300 |
| Colour Rendering Index (CRI): | 80 |
| Instant on (Less than 1 second): | Yes |
| LED Type: | Filament chip |
| Lifetime (hours): | 15000 |
| Switching Cycles: | 7500 |
| Useful Lumens (lm): | 400 |

Environment

| | |
|-------------------------------------|----------|
| EN: | EN-62560 |
| LVD Certified: | Yes |
| CE RoHS: | Yes |
| Energy Rating: | A+ |
| Hg 0% (Mercury Free): | Yes |
| IP Rating (Ingress Protection): | IP20 |
| Lowest Operating Temperature (°C): | -20 |
| Maximum Operating Temperature (°C): | 45 |

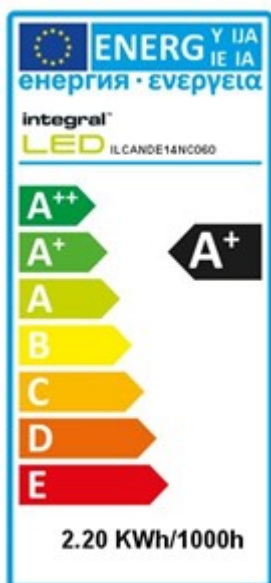

Packaging

| | |
|----------------------|-----|
| Package Weight (g): | 38 |
| Package Length (mm): | 50 |
| Package Width (mm): | 50 |
| Package Depth (mm): | 110 |

Portal.integral-led.com

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

CLASSIC FILAMENT CANDLE BULB E14 250LM 2.2W 5000K NON-DIMM 300 BEAM FROSTED INTEGRAL

ILCANDE14NF059



The Classic Full Glass Frosted lamp utilises Filament LED technology to create a decorative look perfect for fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Details

| | |
|--------------------------|---------------------------------------|
| Quick Order Code: | 462014 |
| Barcode: | 5055788254188 |
| Category: | Lamps |
| Range Name: | Classic |
| Market Segment: | Commercial indoor, Residential indoor |
| Warranty (Years): | 2 |
| CE RoHS: | Yes |

Physical Data

| | |
|---------------------------------|---|
| Product Length (mm): | 98 |
| Product Width (mm): | 35 |
| Product Weight (g): | 18 |
| Material: | Aluminium, Glass |
| Base Term: | Small Edison screw |
| Bulb Base: | E14 |
| Construction: | Glass shell, Filament strip, Aluminium base |
| Globe Finish: | Frosted |
| Globe Type: | Candle |
| Bulb or Luminaire Shape: | Oval |
| Placement / Application: | Indoor, General Lighting |

Electrical Data

| | |
|--------------------------------|--------------|
| Power Consumption (w): | 2.2 |
| Power Factor: | 0.4 |
| Wattage equivalent (W): | 22 |
| Amperage (mA): | 22 |
| Dimming: | Non-Dimmable |
| Driver Included: | Yes |


| | |
|----------------------|----------|
| Electric Current: | AC |
| True Wattage Eq (W): | 22 |
| EN: | EN-62560 |
| LVD Certified: | Yes |

Light Data

| | |
|--|------------------------------|
| Luminous Flux in Lumens (lm): | 250 |
| Luminous efficacy (lm/W): | 114 |
| Correlated Colour Temperature (CCT) (K): | 5000 |
| Colour Temperature: | 5000K - Daylight |
| Colour Temperature Name: | Daylight |
| Beam Angle: | 300 |
| Colour Rendering Index (CRI): | 80 |
| Instant on (Less than 1 second): | Yes |
| LED Type: | Surface mounted device (SMD) |
| Lifetime (hours): | 15000 |
| Switching Cycles: | 7500 |
| Useful Lumens (lm): | 400 |

Environment

| | |
|-------------------------------------|----------|
| EN: | EN-62560 |
| LVD Certified: | Yes |
| CE RoHS: | Yes |
| Energy Rating: | A+ |
| Hg 0% (Mercury Free): | Yes |
| IP Rating (Ingress Protection): | IP20 |
| Lowest Operating Temperature (°C): | -20 |
| Maximum Operating Temperature (°C): | 45 |

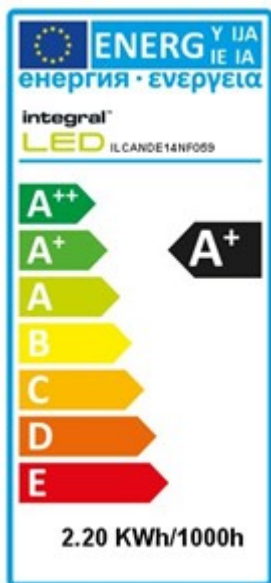

Packaging

| | |
|----------------------|-----|
| Package Weight (g): | 38 |
| Package Length (mm): | 50 |
| Package Width (mm): | 50 |
| Package Depth (mm): | 110 |

Portal.integral-led.com

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE