

**G4 BULB 100LM 1.1W 2700K NON-DIMM 260 BEAM CLEAR INTEGRAL**

ILG4NC003



Integral LED G4 lamps run at less than 2W and offer a lifetime of thousands of hours more than their halogen equivalents. This makes them an ideal retrofit for existing G4 fittings.

**Details**

<b>Quick Order Code:</b>	592196
<b>Barcode:</b>	5055788224501
<b>Category:</b>	Lamps
<b>Range Name:</b>	G4
<b>Product Type:</b>	G4
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	30
<b>Product Width (mm):</b>	9.5
<b>Product Weight (g):</b>	2
<b>Material:</b>	Silicone
<b>Base Term:</b>	G4
<b>Bulb Base:</b>	G4
<b>Construction:</b>	Silicone
<b>Globe Finish:</b>	Clear
<b>Bulb Fixing:</b>	Pendant, Wall, Desktop
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	1.1
<b>Power Consumption (w):</b>	1.1
<b>Power Factor:</b>	0.7
<b>Wattage equivalent (W):</b>	10
<b>Amperage (mA):</b>	90
<b>Dimming:</b>	Non-Dimmable
<b>Driver Included:</b>	No, needs 12V AC/DC Transformer


Electric Current: AC/DC  
EN: EN 61547:2009

## Light Data

Luminous Flux in Lumens (lm): 100  
Luminous efficacy (lm/W): 91  
Correlated Colour Temperature (CCT) (K): 2700  
Colour Temperature: 2700K - Warm  
Colour Temperature Name: Warm  
Beam Angle: 260  
Colour Rendering Index (CRI): 80  
Instant on (Less than 1 second): Yes  
LED Type: COB  
Lifetime (hours): 15000  
Switching Cycles: 7500

## Environment

EN: EN 61547:2009  
CE RoHS: Yes  
Energy Rating: A++  
Hg 0% (Mercury Free): Yes  
IP Rating (Ingress Protection): IP20  
Lowest Operating Temperature (°C): -20  
Maximum Operating Temperature (°C): 40

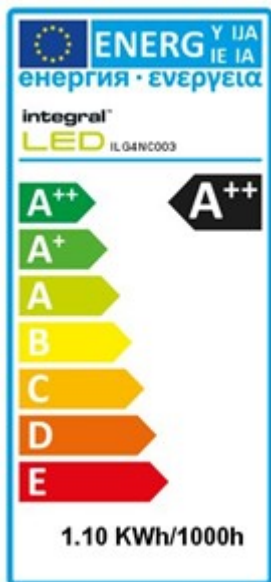

## Packaging

Package Weight (g): 2.3  
Package Length (mm): 37  
Package Width (mm): 15  
Package Depth (mm): 15

[Portal.integral-led.com](http://Portal.integral-led.com)

**G4 BULB 110LM 1.1W 4000K NON-DIMM 260 BEAM CLEAR INTEGRAL**

ILG4NE004



Integral LED G4 lamps run at less than 2W and offer a lifetime of thousands of hours more than their halogen equivalents. This makes them an ideal retrofit for existing G4 fittings.

**Details**

<b>Quick Order Code:</b>	425216
<b>Barcode:</b>	5055788224518
<b>Category:</b>	Lamps
<b>Range Name:</b>	G4
<b>Product Type:</b>	G4
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	30
<b>Product Width (mm):</b>	9.5
<b>Product Weight (g):</b>	2
<b>Material:</b>	Silicone
<b>Base Term:</b>	G4
<b>Bulb Base:</b>	G4
<b>Construction:</b>	Silicone
<b>Globe Finish:</b>	Clear
<b>Bulb Fixing:</b>	Pendant, Wall, Desktop
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	1.1
<b>Power Consumption (w):</b>	1.1
<b>Power Factor:</b>	0.7
<b>Wattage equivalent (W):</b>	10
<b>Amperage (mA):</b>	90
<b>Dimming:</b>	Non-Dimmable
<b>Driver Included:</b>	No, needs 12V AC/DC Transformer


Electric Current: AC/DC  
EN: EN 61547:2009

## Light Data

Luminous Flux in Lumens (lm): 110  
Luminous efficacy (lm/W): 100  
Correlated Colour Temperature (CCT) (K): 4000  
Colour Temperature: 4000K - Cool White  
Colour Temperature Name: Cool White  
Beam Angle: 260  
Colour Rendering Index (CRI): 80  
Instant on (Less than 1 second): Yes  
LED Type: COB  
Lifetime (hours): 15000  
Switching Cycles: 7500

## Environment

EN: EN 61547:2009  
CE RoHS: Yes  
Energy Rating: A++  
Hg 0% (Mercury Free): Yes  
IP Rating (Ingress Protection): IP20  
Lowest Operating Temperature (°C): -20  
Maximum Operating Temperature (°C): 40

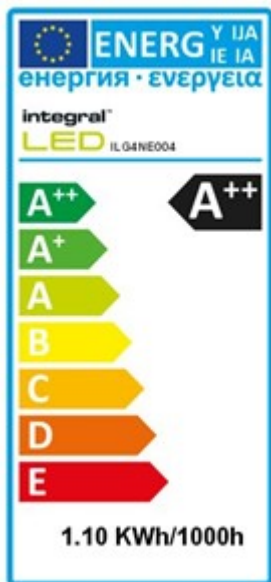

## Packaging

Package Weight (g): 2.3  
Package Length (mm): 37  
Package Width (mm): 15  
Package Depth (mm): 15

[Portal.integral-led.com](http://Portal.integral-led.com)