

**OMNI FILAMENT GLS BULB E27 470LM 4.5W 2700K DIMMABLE 300 BEAM  
CLEAR FULL GLASS INTEGRAL**

ILGLSE27DC052



Integral Filament Omni GLS Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in ceiling pendants and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

**Details**

<b>Quick Order Code:</b>	400761
<b>Barcode:</b>	5055788222439
<b>Category:</b>	Lamps
<b>Range Name:</b>	Omni
<b>Product Type:</b>	GLS
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	104
<b>Product Width (mm):</b>	60
<b>Product Weight (g):</b>	32
<b>Material:</b>	Aluminium, Glass
<b>Base Term:</b>	Edison screw
<b>Bulb Base:</b>	E27
<b>Construction:</b>	Glass shell, Filament strip, Aluminium base
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	GLS
<b>Bulb Fixing:</b>	Pendant, Wall, lamp stand, table lamp
<b>Bulb or Luminaire Shape:</b>	Round
<b>Placement / Application:</b>	Indoor, Outdoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	4.2
<b>Power Consumption (w):</b>	4.2
<b>Power Factor:</b>	0.5


<b>Wattage equivalent (W):</b>	40
<b>Amperage (mA):</b>	25
<b>Dimming:</b>	Dimmable
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	470
<b>Luminous efficacy (lm/W):</b>	112
<b>Correlated Colour Temperature (CCT) (K):</b>	2700
<b>Colour Temperature:</b>	2700K - Warm
<b>Colour Temperature Name:</b>	Warm
<b>Beam Angle:</b>	320
<b>Colour Rendering Index (CRI):</b>	80
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Filament chip
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	7500

## Environment

<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>Energy Rating:</b>	A++
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	45

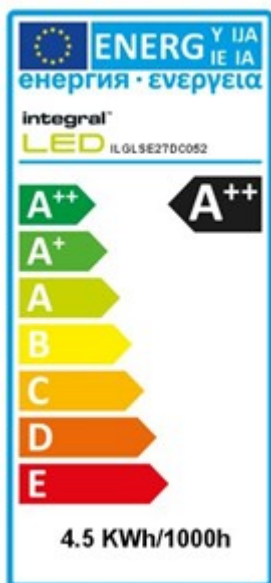

## Packaging

<b>Package Weight (g):</b>	55	<a href="http://Portal.integral-led.com">Portal.integral-led.com</a>
<b>Package Length (mm):</b>	65	

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

<b>Package Width (mm):</b>	65
<b>Package Depth (mm):</b>	120
<b>Qty per euro pallet:</b>	1350

**OMNI FILAMENT GLS BULB E27 1055LM 9W 2700K DIMMABLE 300 BEAM  
CLEAR FULL GLASS INTEGRAL**

ILGLSE27DC056



THIS ITEM IS NOW UPGRADED OR DISCONTINUED. CONTACT US TO FIND A REPLACEMENT PRODUCT.

Integral Filament Omni GLS Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in ceiling pendants and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

**Details**

<b>Quick Order Code:</b>	263149
<b>Barcode:</b>	5055788222477
<b>Category:</b>	Lamps
<b>Range Name:</b>	Omni
<b>Product Type:</b>	GLS
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	118
<b>Product Width (mm):</b>	67
<b>Product Weight (g):</b>	51
<b>Material:</b>	Aluminium, Glass
<b>Base Term:</b>	Edison screw
<b>Bulb Base:</b>	E27
<b>Construction:</b>	Glass shell, Filament strip, Aluminium base
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	GLS
<b>Bulb Fixing:</b>	Pendant, Wall, lamp stand, table lamp
<b>Bulb or Luminaire Shape:</b>	Round
<b>Placement / Application:</b>	Indoor, Outdoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	9
<b>Power Consumption (w):</b>	9


<b>Power Factor:</b>	0.7
<b>Wattage equivalent (W):</b>	75
<b>Amperage (mA):</b>	50
<b>Dimming:</b>	Dimmable
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	1055
<b>Luminous efficacy (lm/W):</b>	117
<b>Correlated Colour Temperature (CCT) (K):</b>	2700
<b>Colour Temperature:</b>	2700K - Warm
<b>Colour Temperature Name:</b>	Warm
<b>Beam Angle:</b>	300, 330
<b>Colour Rendering Index (CRI):</b>	80
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Filament chip
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	7500

## Environment

<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>Energy Rating:</b>	A+
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	45

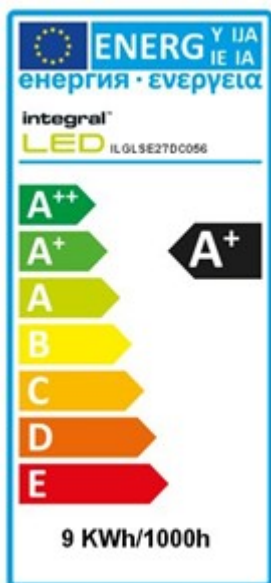

## Packaging

<b>Package Weight (g):</b>	110
----------------------------	-----

[Portal.integral-led.com](http://Portal.integral-led.com)

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

<b>Package Length (mm):</b>	70
<b>Package Width (mm):</b>	70
<b>Package Depth (mm):</b>	125
<b>Qty per euro pallet:</b>	1350