

GU10 620LM 6W 2700K DIMMABLE 36 BEAM INTEGRAL

ILGU10DC117



The Integral LED High Lumen GU10 range offers a fantastic ratio of value and performance. By incorporating a stylish engineered lens in an affordable GU10, the High Lumen offers directional light with a beam angle that closely mirrors that of familiar halogen lamps along with all the energy-saving and long-life benefits of LED.

Details

Quick Order Code:	765552
Barcode:	5055788255567
Category:	Lamps
Range Name:	240V GU10 Base
Product Type:	GU10
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	54
Product Width (mm):	54
Product Weight (g):	28
Optic:	Designed to give a Classic Look
Material:	Plastic and Aluminium heat-sink, Injection moulded diffuser
Base Term:	GU10
Bulb Base:	GU10
Construction:	Plastic White and "Classic look" diffuser lens
Globe Finish:	Clear
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting
Spot Type:	SMD

Electrical Data

Power (W):	5.7
Power Consumption (w):	5.7


Power Factor:	0.5
Wattage equivalent (W):	75
Amperage (mA):	33
Dimming:	Dimmable with compatible dimmers
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	75
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	620
Luminous efficacy (lm/W):	105
Peak Intensity (Cd):	1050
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	36
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight JQP401W
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	25000
Switching Cycles:	12500
Useful Lumens (lm):	540

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A++
Hg 0% (Mercury Free):	Yes
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

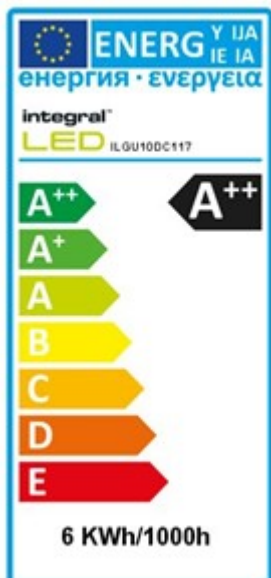

Portal.integral-led.com

Packaging

Package Weight (g):	37
Package Length (mm):	48
Package Width (mm):	48
Package Depth (mm):	62

GU10 620LM 6W 3000K DIMMABLE 36 BEAM INTEGRAL

ILGU10DD120



The Integral LED High Lumen GU10 range offers a fantastic ratio of value and performance. By incorporating a stylish engineered lens in an affordable GU10, the High Lumen offers directional light with a beam angle that closely mirrors that of familiar halogen lamps along with all the energy-saving and long-life benefits of LED.

Details

Quick Order Code:	831606
Barcode:	5055788255772
Category:	Lamps
Range Name:	240V GU10 Base
Product Type:	GU10
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	54
Product Width (mm):	54
Product Weight (g):	28
Optic:	Designed to give a Classic Look
Material:	Plastic and Aluminium heat-sink, Injection moulded diffuser
Base Term:	GU10
Bulb Base:	GU10
Construction:	Plastic White and "Classic look" diffuser lens
Globe Finish:	Clear
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting
Spot Type:	SMD

Electrical Data

Power (W):	5.7
Power Consumption (w):	5.7


Power Factor:	0.5
Wattage equivalent (W):	75
Amperage (mA):	33
Dimming:	Dimmable with compatible dimmers
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	75
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	620
Luminous efficacy (lm/W):	105
Peak Intensity (Cd):	1050
Correlated Colour Temperature (CCT) (K):	3000
Colour Temperature:	3000K - Warm White
Colour Temperature Name:	Warm
Beam Angle:	36
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight JQP401W
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	25000
Switching Cycles:	12500
Useful Lumens (lm):	540

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A++
Hg 0% (Mercury Free):	Yes
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

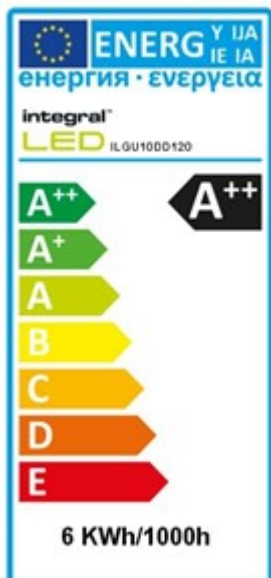

Portal.integral-led.com

Packaging

Package Weight (g):	37
Package Length (mm):	48
Package Width (mm):	48
Package Depth (mm):	62

GU10 640LM 6W 4000K DIMMABLE 36 BEAM INTEGRAL

ILGU10DE118



The Integral LED High Lumen GU10 range offers a fantastic ratio of value and performance. By incorporating a stylish engineered lens in an affordable GU10, the High Lumen offers directional light with a beam angle that closely mirrors that of familiar halogen lamps along with all the energy-saving and long-life benefits of LED.

Details

Quick Order Code:	925008
Barcode:	5055788255574
Category:	Lamps
Range Name:	240V GU10 Base
Product Type:	GU10
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	54
Product Width (mm):	50
Product Weight (g):	28
Optic:	Designed to give a Classic Look
Material:	Plastic and Aluminium heat-sink, Injection moulded diffuser
Base Term:	GU10
Bulb Base:	GU10
Construction:	Plastic White and "Classic look" diffuser lens
Globe Finish:	Clear
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting
Spot Type:	SMD

Electrical Data

Power Consumption (w):	6
Power Factor:	0.6


Wattage equivalent (W):	75
Amperage (mA):	41
Dimming:	Dimmable with compatible dimmers
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	75
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	640
Peak Intensity (Cd):	950
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature:	4000K - Cool White
Colour Temperature Name:	Cool White
Beam Angle:	36
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight JQP401W
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	25000
Switching Cycles:	12500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A++
Hg 0% (Mercury Free):	Yes
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

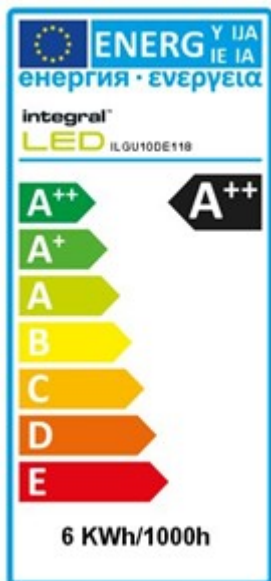

Packaging

Package Weight (g):	38
----------------------------	----

Portal.integral-led.com

Package Length (mm):	48
Package Width (mm):	48
Package Depth (mm):	62

GU10 640LM 6W 6500K DIMMABLE 36 BEAM INTEGRAL

ILGU10DG119



The Integral LED High Lumen GU10 range offers a fantastic ratio of value and performance. By incorporating a stylish engineered lens in an affordable GU10, the High Lumen offers directional light with a beam angle that closely mirrors that of familiar halogen lamps along with all the energy-saving and long-life benefits of LED.

Details

Quick Order Code:	787223
Barcode:	5055788255581
Category:	Lamps
Range Name:	240V GU10 Base
Product Type:	GU10
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	54
Product Width (mm):	50
Product Weight (g):	28
Optic:	Designed to give a Classic Look
Material:	Plastic and Aluminium heat-sink, Injection moulded diffuser
Base Term:	GU10
Bulb Base:	GU10
Construction:	Plastic White and "Classic look" diffuser lens
Globe Finish:	Clear
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting
Spot Type:	SMD

Electrical Data

Power Consumption (w):	6
Power Factor:	0.6


Wattage equivalent (W):	75
Amperage (mA):	41
Dimming:	Dimmable with compatible dimmers
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	75
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	640
Peak Intensity (Cd):	950
Correlated Colour Temperature (CCT) (K):	6500
Colour Temperature:	6500K - Cool Daylight
Colour Temperature Name:	Daylight
Beam Angle:	36
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight JQP401W
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	25000
Switching Cycles:	12500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A++
Hg 0% (Mercury Free):	Yes
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

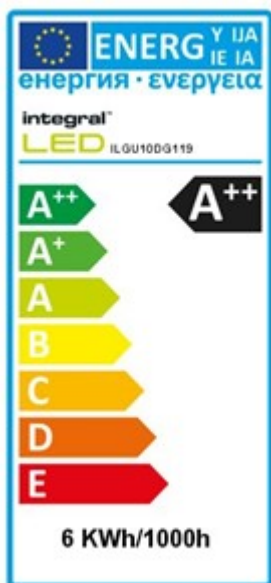

Packaging

Package Weight (g):	38
----------------------------	----

Portal.integral-led.com

Package Length (mm):	48
Package Width (mm):	48
Package Depth (mm):	62