

NEW New product for 2018

 3 year ext. warranty*

 Emergency options available

Skypack™ Quick Release 4ft

Intelligent press release design

- Intelligent press release buttons for simple installation
- Ultra efficient, up to 120 lumens per circuit Watt
- Suitable for temperatures -10°C to 50°C
- Press fit terminals, loop in loop out
- Rear and end conduit entry points
- Suspended LED tray for easy installation



Classification

⊕ Class 1
IP20 | 240V
(Emergency versions consume 2W when charging)

LED

4000K | CRI: Ra (80)


Finishes

White

Construction

Body: Steel
Diffuser: Polycarbonate

JC71741 / JC71742



Code	Description	Col temp.	Dim.	Watt	Lumens	LpcW
JC71741	Skypack QR 4ft single	4000K	No	23W	2760	120
JC71741EM	Skypack QR 4ft single emergency	4000K	No	25W	2760	110
JC71742	Skypack QR 4ft twin	4000K	No	40W	4800	120
JC71742EM	Skypack QR 4ft twin emergency	4000K	No	42W	4800	114

*Requires online registration.

Skypack™ Quick Release 5ft

Intelligent press release design

- Intelligent press release buttons for simple installation
- Ultra efficient, up to 120 lumens per circuit Watt
- Suitable for temperatures -10°C to 50°C
- Press fit terminals, loop in loop out
- Rear and end conduit entry points
- Suspended LED tray for easy installation

NEW

New product
for 20183 year
ext. warranty*Emergency
options available

Classification

⊕ Class 1
IP20 | 240V
(Emergency versions consume
2W when charging)

LED

4000K | CRI: Ra (80)


Finishes

White

Construction

Body: Steel
Diffuser: Polycarbonate


JC71743 / JC71744

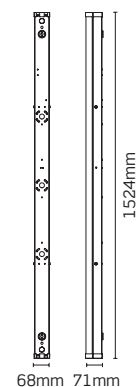

Code	Description	Col temp.	Dim.	Watt	Lumens	LpcW
JC71743	Skypack QR 5ft single	4000K	No	37W	4440	120
JC71743EM	Skypack QR 5ft single emergency	4000K	No	39W	4440	113
JC71744	Skypack QR 5ft twin	4000K	No	60W	7200	120
JC71744EM	Skypack QR 5ft twin emergency	4000K	No	62W	7200	116

*Requires online registration.

NEW New product for 2018

 3 year ext. warranty*

 Emergency options available


Skypack™ Quick Release 6ft

Intelligent press release design

- Intelligent press release buttons for simple installation
- Ultra efficient, up to 120 lumens per circuit Watt
- Suitable for temperatures -10°C to 50°C
- Press fit terminals, loop in loop out
- Rear and end conduit entry points
- Suspended LED tray for easy installation



Classification

 Class 1
IP20 | 240V
(Emergency versions consume 2W when charging)

LED

4000K | CRI: Ra (80)


Finishes

White

Construction

Body: Steel
Diffuser: Polycarbonate

JC71745

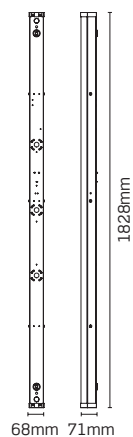

Code	Description	Col temp.	Dim.	Watt	Lumens	LpcW
JC71745	Skypack QR 6ft single	4000K	No	54W	6480	120
JC71745EM	Skypack QR 6ft single emergency	4000K	No	56W	6480	116

*Requires online registration.