

# **User Manual**

for Kinetic Wall Switches

CUL 40031

CUL 40032

CUL 40033


CUL 40034

CUL 40035


CUL 40036

## A. What is in the box ?

1 Gang:




x 1



x 2




x 2



x 1

or 2 Gang:




x 1



x 2




x 2




x 1

or 3 Gang:




x 1



x 2






x 2



x 1

## B. Specifications

**Dimensions:**

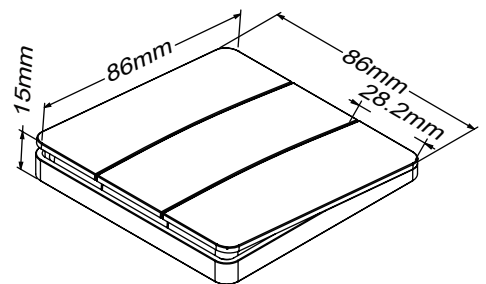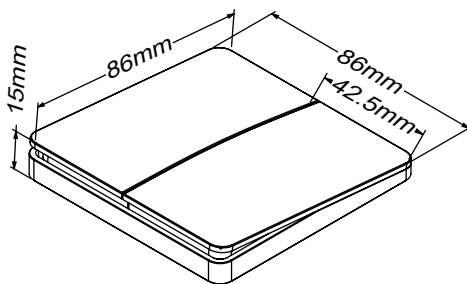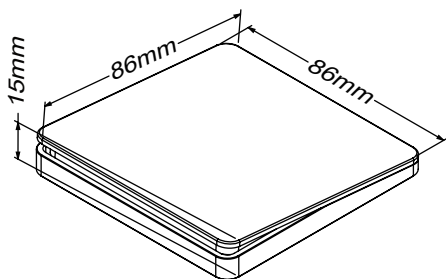

**Power Source:**

Self Powered (Kinetic)

**Radio Frequency:**

433 MHz

**Switching Type:**

Push Switch

**Dimming Type:**

Push Selected

Only available on 2 Gang Switch

**IP Rating:**

IP42

**Body Material:**

Polycarbonate

**Transmission Range:**

Outdoor 150m (no barrier)

Indoor 25m (plaster board; drywall)

Indoor 12m (concret, glass walls)

(Range may vary depending on surrounding situation)





CE RoHS



# C. Installations


## 1. Screw Installation

(a) Remove front cover;

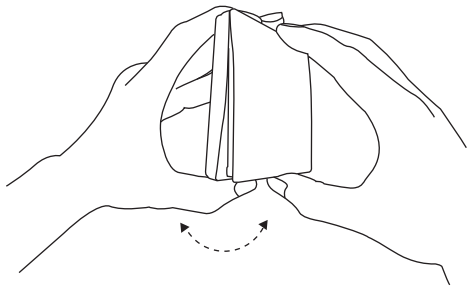


Inserting a coin into the switch gap and twisting it, can help to open the cover.


(b) Fix to back box;

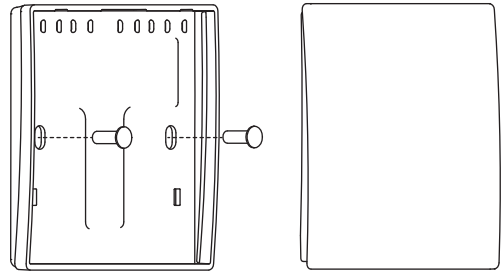

(c) Reinstall front cover;

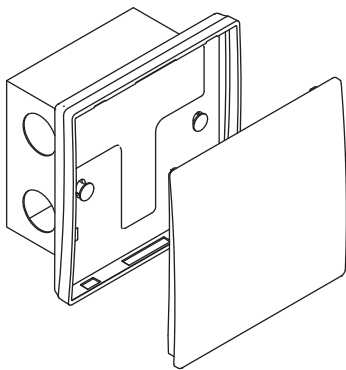


(d) Installation Completed.




## 2. Surface Installation


(a) Remove sticker cover;




(b) Apply to the switch;

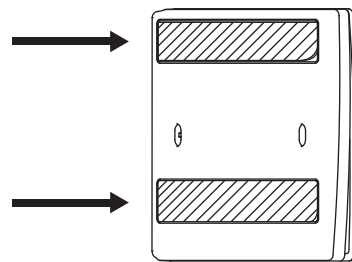


(c) Clean the surface

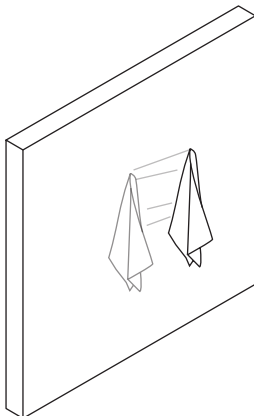

(d) Attach the switch to surface.

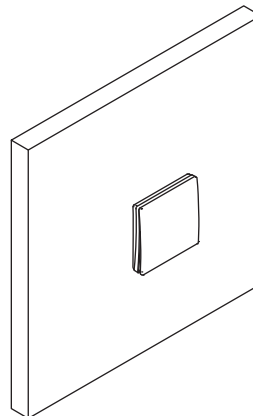

## D. Operation



1 Gang




2 Gang




3 Gang


I/O ON / OFF Switch



1 Zone



2 Zone




3 Zone

Dimmer Switch




1 Zone

CCT Switch




1 Zone

RGB Switch




1 Zone


## E. Compatible controllers (Order seperately.)



ON / OFF Receiver



ON / OFF Receiver  
Tuya Wifi (2.4G)



Dimmer Receiver  
Tuya Wifi (2.4G)