



BOLLARDS SPECIFICATION SHEET




**COLLINGWOOD
LIGHTING**

01604 495 151
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

BOL LED

Straight to mains Oak wood

FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Bathroom zone	-
Inrush Current	17.9A 0.1ms
Construction Material	Oak wood
Weight	5500g
Maximum ambient temperature	35°C
SELV	N/A (Integrated SELV driver)
Electric Class [1, 2, 3]	2

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

Choice of wood finishes: Iroko, Sapele or Oak

Pointed, Chamfered or Domed top

Choice of low-voltage or straight-to-mains

Side-entry cable or base-entry cable options

Three colour temperature options: 2700K, 3000K or 4000K

7 year warranty

PHOTOMETRICS @ 25°C

Product code	Feature I	Feature II	Feature III	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
BL03D0B27	Triple LED	Domed	Base cable entry	5W	2700K	110°	156	31	78

WIRING INFORMATION

Cable / Flying Lead	NEW 1.5mm SY 2 Core PVC Steel Braid Cable
Type of Wiring Required	Parallel


LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	N/A	N/A	N/A	N/A	N/A	N/A


ACCESSORIES

BOL LED BRACKET
JB5

Beam angle:

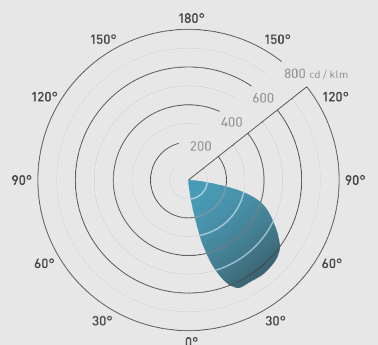

Recessed mount



Surface mount

