

DECORATIVE WALL LIGHTS + UNDERSHELF LIGHTING

SPECIFICATION SHEET



MC020 S

Up / down mini cuboid LED wall light

FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Dimmable	Yes With suitable driver
Input	350mA
LED Lifetime	70,000h L70 B10
CRI	>80Ra or -
SDCM	3SDCM

INSTALLATION INFORMATION

Cut Out Size	Ø 20mm
Bathroom zone	1
Construction Material	Anodised aluminium
Weight	200g
Maximum ambient temperature	35°C
Electric Class [1, 2, 3]	3

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
MC020 S NW	2W	4000K	12°	140	70	1485
MC020 S WW	2W	3000K	12°	110	55	1466
MC020 S 27	2W	2700K	12°	107	54	1425
MC020 S AMBER	2W	Amber	12°	-	-	-
MC020 S BLUE	2W	Blue	12°	-	-	-
MC020 S GREEN	2W	Green	12°	-	-	-
MC020 S RED	2W	Red	12°	-	-	-

WIRING INFORMATION

Cable / Flying Lead	0.15m (0.205mm ² red & black PTFE)
Type of Wiring Required	Series

LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	N/A	Yes	No	1	1	4
PLR/350 1-5	N/A	Yes	No	1	1	2
PLD UNI-DRIVE 350MA	N/A	Yes	Yes [1-10V]	2	1	5


ACCESSORIES


CR135	PTFE cable
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types
UY2 CONNECTOR	Quick waterproof connector




COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS


Bi-directional mini cube for discreet accent lighting of interior and exterior spaces

Bespoke wall plug for easy installation

Quality brushed aluminium finish

Requires 20mm drill bit

Beam angle: 12°

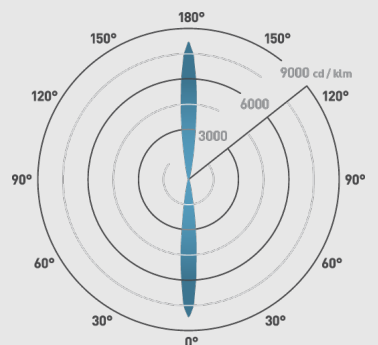

33x33/29.5mm

