

WALL LIGHTS SPECIFICATION SHEET



MC050

Straight to mains, decorative wall light

FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	No
Dimmable	No
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	9A 0.8ms
Construction Material	Anodised aluminium
Weight	0.9kg
Maximum ambient temperature	35°C
Electric Class [1, 2, 3]	1

PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
MC050 NW	Silver	6.5W	4000K	110°	312	48	163
MC050 WW	Silver	6.5W	3000K	110°	243	37	118
MC050 27	Silver	6.5W	2700K	110°	236	36	158

WIRING INFORMATION

Cable / Flying Lead	0.3m
Type of Wiring Required	Parallel

LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	220-240V	Yes	No	N/A	N/A	N/A


ACCESSORIES


N/A	No accessories required
-----	-------------------------




COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

Complete with wall fixings and waterproof crimp connectors


Integral LED light for decorative effect (MC050)

Equivalent to 35W halogen

Light source
energy efficiency:



Beam angle: 110°

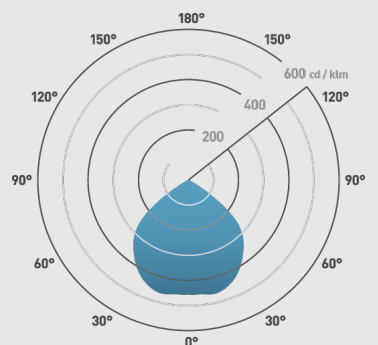

156mm

