

DECORATIVE WALL LIGHTS + UNDERSHELF LIGHTING

SPECIFICATION SHEET



ML03

Mini halo LED wall light

FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Dimmable	Yes With suitable driver
Input	350mA
LED Lifetime	70,000h L70 B10
CRI	>80Ra or -
SDCM	3SDCM

INSTALLATION INFORMATION

Cut Out Size	Ø 26mm
Bathroom zone	1
Construction Material	Anodised aluminium
Weight	60g
Maximum ambient temperature	30°C
Electric Class [1, 2, 3]	3

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	lm	lm/W	lx @ 1m
ML03 NW	1W	4000K	40	40	4
ML03 WW	1W	3000K	28	28	3
ML03 27	1W	2700K	27	27	3
ML03 AMBER	1W	Amber	-	-	-
ML03 BLUE	1W	Blue	-	-	-
ML03 GREEN	1W	Green	-	-	-
ML03 RED	1W	Red	-	-	-

WIRING INFORMATION

Cable / Flying Lead	1m (0.205mm ² red & black PTFE)
Type of Wiring Required	Series

LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	220-240V	Yes	No	1	1	9
PLR/350 1-5	220-240V	Yes	No	Hors volume	1	5
PLD UNI-DRIVE 350MA	220-240V	Yes	Yes (1-10V)	2	1	10

ACCESSORIES

CR135	PTFE cable
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types
UY2 CONNECTOR	Quick waterproof connector



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

GUARANTEE / WARRANTY

7 year extended warranty


FEATURES & BENEFITS

Raised profile creates diffused glow effect on surrounding surface

Can be used for interior and exterior applications

Small, discreet and low glare decorative LED light

Beam angle:

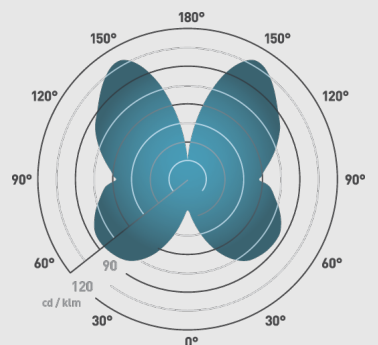

Ø30mm

