

### General Information

Dimensions (mm)	115 (Dia.) x 67 (D)
Materials	Bezel: Powdercoated Aluminium; Diffuser & Housing: Polycarbonate
Finish	White (RAL 9016)
Product Weight (Kg)	0.21
Cutout Diameter (mm)	90
Recess Depth (mm)	67
Ingress Protection	IP54
Maximum Ceiling Thickness (mm)	20
Warranty (Years)	5

### Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	900	950	900
Efficacy (lm/W)	90	95	90
Beam Angle (°)	60		
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

### Dimming Information


Dimmable	Yes
Dimming Format	Triac


### Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	200-240 50/60
Safety Class	II
Circuit Wattage (W)	10
LED Wattage (W)	10
Input Current (mA)	50
Inrush Current	2.67A (76µs)
Power Factor	>0.9
Driver Information	Remote Driver Supplied
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+90

### Compatible Accessories

- OVCGMF0003 - 240V~ 12.7-33.7W 3 in 1 Multi-function Dimmable Constant Current LED Driver
- OVEMCG50 - 3 Hour Emergency Pack
- OVEMCG50ST - 3 Hour Self-Test Emergency Pack

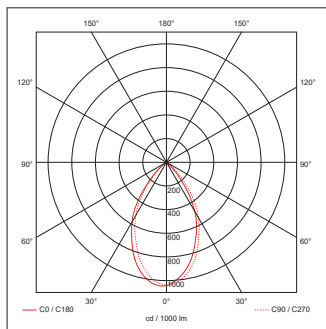

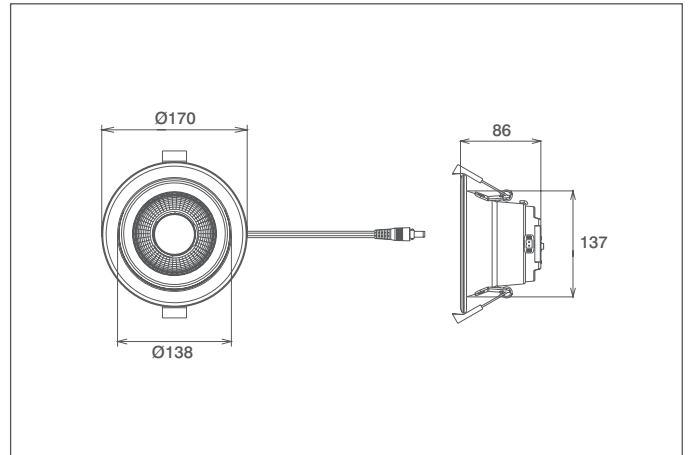

### General Information

Dimensions (mm)	170 (Dia.) x 86 (D)
Materials	Bezel: Powdercoated Aluminium; Diffuser & Housing: Polycarbonate
Finish	White (RAL 9016)
Product Weight (Kg)	0.26
Cutout Diameter (mm)	140
Recess Depth (mm)	86
Ingress Protection	IP54
Maximum Ceiling Thickness (mm)	20
Warranty (Years)	5

### Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	1250	1320	1290
Efficacy (lm/W)	99	105	102
Beam Angle (°)	60		
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

### Dimming Information


Dimmable	Yes
Dimming Format	Triac



### Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	200-240 50/60
Safety Class	II
Circuit Wattage (W)	13
LED Wattage (W)	13
Input Current (mA)	60
Inrush Current	2.67A (76µs)
Power Factor	>0.9
Driver Information	Remote Driver Supplied
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+90

### Compatible Accessories

- OVCGMF0003 - 240V~ 12.7-33.7W 3 in 1 Multi-function Dimmable Constant Current LED Driver
- OVEMCG50 - 3 Hour Emergency Pack
- OVEMCG50ST - 3 Hour Self-Test Emergency Pack

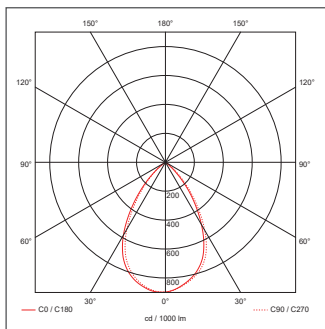

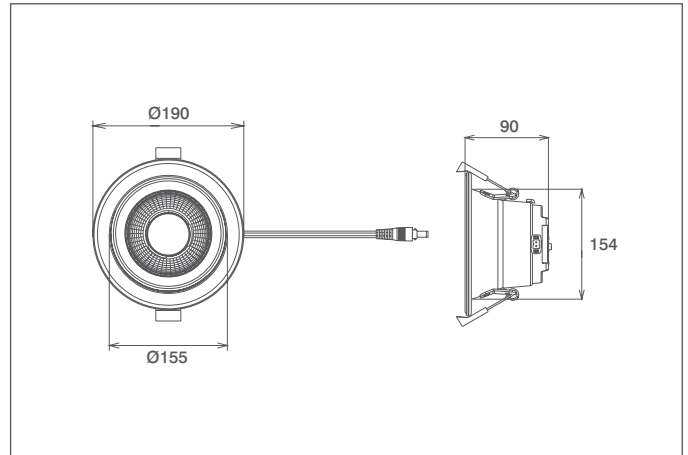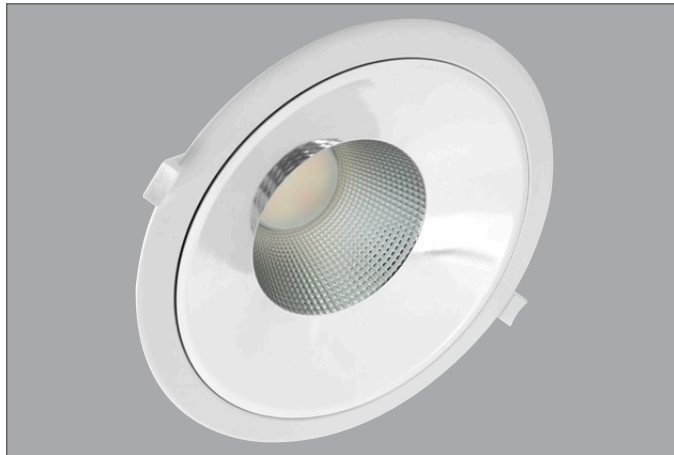

### General Information

Dimensions (mm)	190 (Dia.) x 90 (D)
Materials	Bezel: Powdercoated Aluminium; Diffuser & Housing: Polycarbonate
Finish	White (RAL 9016)
Product Weight (Kg)	0.36
Cutout Diameter (mm)	160
Recess Depth (mm)	90
Ingress Protection	IP54
Maximum Ceiling Thickness (mm)	20
Warranty (Years)	5

### Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	1900	2100	1980
Efficacy (lm/W)	106	118	110
Beam Angle (°)	60		
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

### Dimming Information


Dimmable	Yes
Dimming Format	Triac



### Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	200-240 50/60
Safety Class	II
Circuit Wattage (W)	18
LED Wattage (W)	18
Input Current (mA)	90
Inrush Current	2.18A (135µs)
Power Factor	>0.9
Driver Information	Remote Driver Supplied
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+90

### Compatible Accessories

- OVCGMF0003 - 240V~ 12.7-33.7W 3 in 1 Multi-function Dimmable Constant Current LED Driver
- OVEMCG50 - 3 Hour Emergency Pack
- OVEMCG50ST - 3 Hour Self-Test Emergency Pack

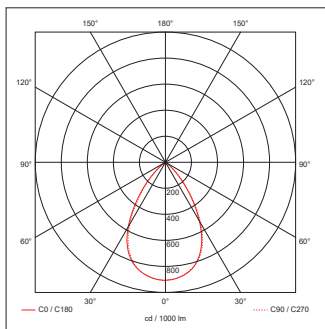

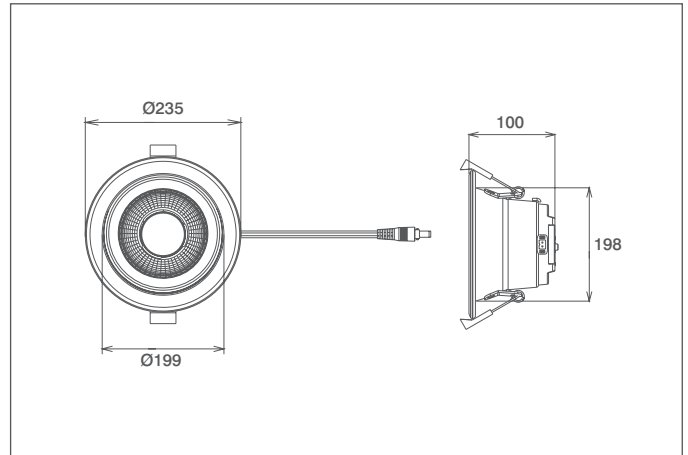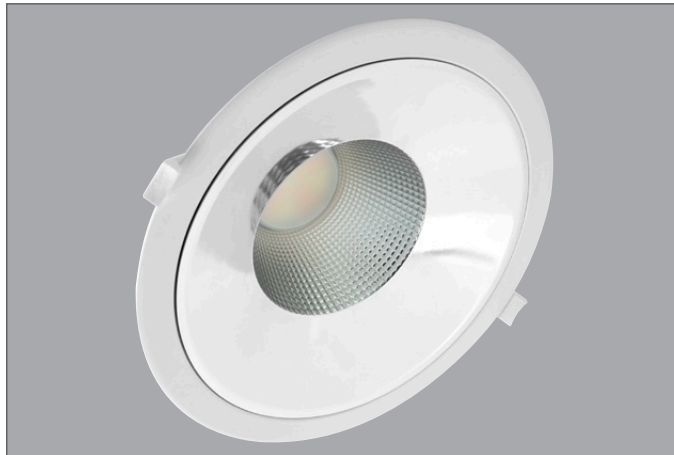

### General Information

Dimensions (mm)	235 (Dia.) x 100 (D)
Materials	Bezel: Powdercoated Aluminium; Diffuser & Housing: Polycarbonate
Finish	White (RAL 9016)
Product Weight (Kg)	0.52
Cutout Diameter (mm)	200
Recess Depth (mm)	100
Ingress Protection	IP54
Maximum Ceiling Thickness (mm)	20
Warranty (Years)	5

### Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	2550	2720	2600
Efficacy (lm/W)	102	109	104
Beam Angle (°)	60		
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

### Dimming Information


Dimmable	Yes
Dimming Format	Triac



### Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	200-240 50/60
Safety Class	II
Circuit Wattage (W)	25
LED Wattage (W)	25
Input Current (mA)	130
Inrush Current	3.06A (224µs)
Power Factor	>0.9
Driver Information	Remote Driver Supplied
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+90

### Compatible Accessories

- OVCGMF0003 - 240V~ 12.7-33.7W 3 in 1 Multi-function Dimmable Constant Current LED Driver
- OVEMCG50 - 3 Hour Emergency Pack
- OVEMCG50ST - 3 Hour Self-Test Emergency Pack

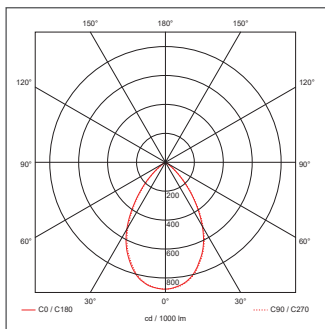

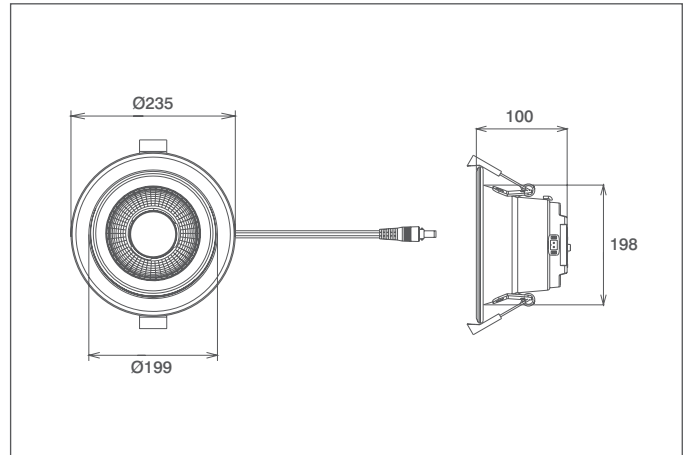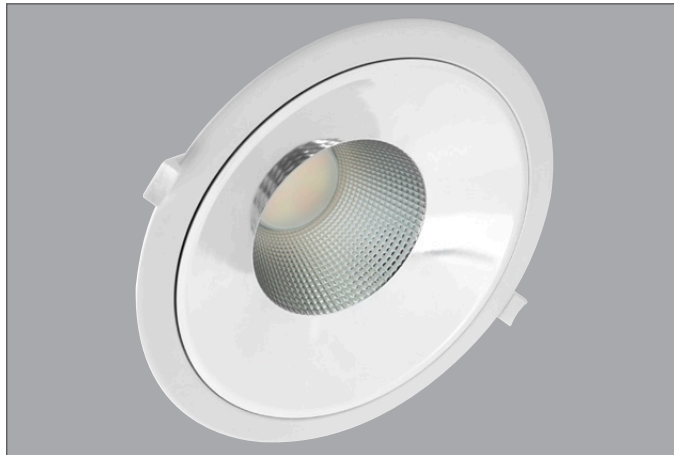

### General Information

Dimensions (mm)	235 (Dia.) x 100 (D)
Materials	Bezel: Powdercoated Aluminium; Diffuser & Housing: Polycarbonate
Finish	White (RAL 9016)
Product Weight (Kg)	0.52
Cutout Diameter (mm)	200
Recess Depth (mm)	100
Ingress Protection	IP54
Maximum Ceiling Thickness (mm)	20
Warranty (Years)	5

### Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	3300	3560	3420
Efficacy (lm/W)	98	108	99
Beam Angle (°)	60		
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

### Dimming Information

Dimmable	Yes
Dimming Format	Triac

### Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	200-240 50/60
Safety Class	II
Circuit Wattage (W)	35
LED Wattage (W)	35
Input Current (mA)	170
Inrush Current	3.06A (224µs)
Power Factor	>0.9
Driver Information	Remote Driver Supplied
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+90

### Compatible Accessories

OVCGMF0001 - 240V~ 29-48W 3 in 1 Multi-function Dimmable Constant Current LED Driver
OVEMCG50 - 3 Hour Emergency Pack
OVEMCG50ST - 3 Hour Self-Test Emergency Pack

