
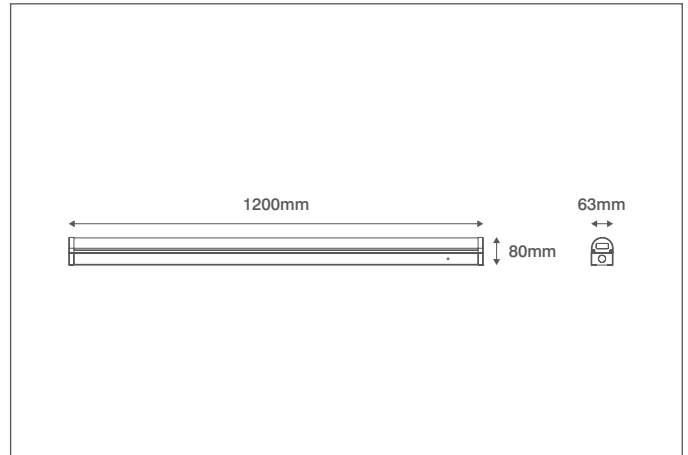


INCEPTOR® B-LITE

Technical Specification

Product Code: OV82120

Description: 28-40W 1200mm Multi-Current Linear LED Batten

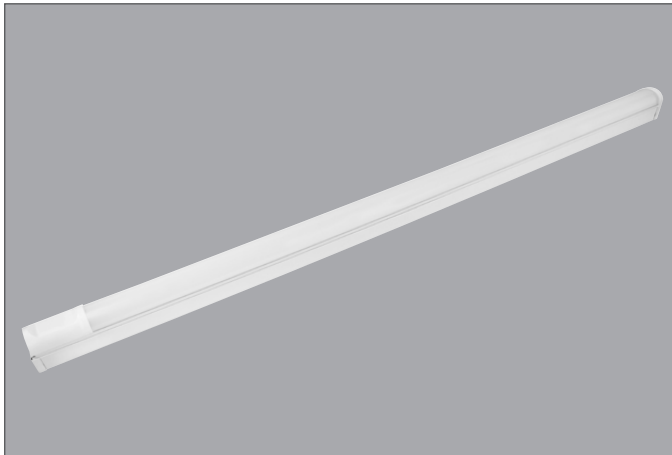

General Information

Dimensions (mm)	1200 (L) x 63 (W) x 80 (D)
Materials	Base: Powdercoated Steel; Opaque Diffuser: Polycarbonate
Base Finish	White (RAL 9010)
Product Weight (Kg)	1.2
Ingress Protection	IP20
Impact Rating (IK)	08
Mounting	Ceiling or Wall
Warranty (Years)	5

Supply & Power Information


Input Voltage & Frequency (V~ / Hz)	200-240 50
Safety Class	I
Surge Protection Installed	
Circuit Wattage (W)	28/32/36/40
Input Current (A)	200
Inrush Current	0.2A (<0.5S)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+80
Input Terminations	3 Pole Push Fit Terminals

Luminaire Output


LED Wattage	28	32	36	40
Typical Luminous Flux	2940	3360	3780	4200
Efficacy	105	105	105	105
Circuit Wattage	28	32	36	40
Beam Angle (°)	120			
Colour Temperature (K)	4000			
Flicker Free	Yes			
Colour Rendering Index (CRI)	>80			
Energy Classification	F			
LED Lifetime (L70)	50000			

Dimming Information


Dimmable	No
----------	----

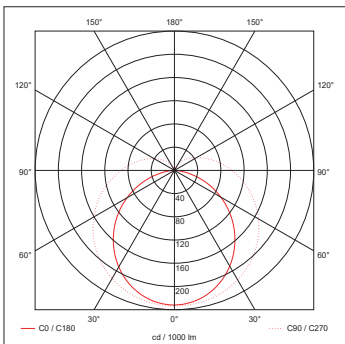


28W

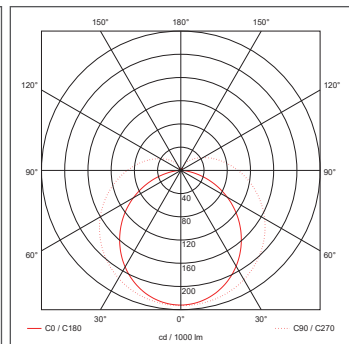

32W

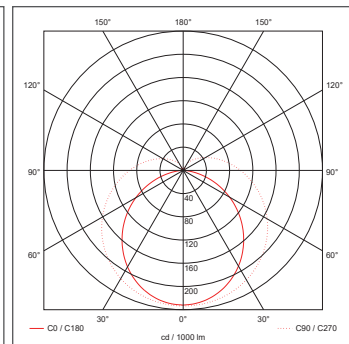

36W

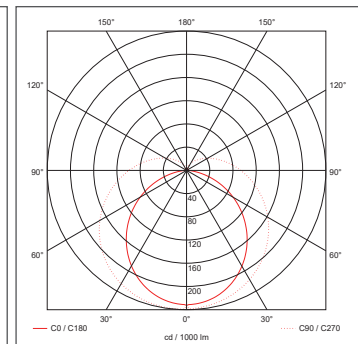

40W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640


E: sales@oviaUK.com | W: oviaUK.com

INCEPTOR® B-LITE

Technical Specification

Product Code: OV82150

Description: 42-60W 1500mm Multi-Current Linear LED Batten

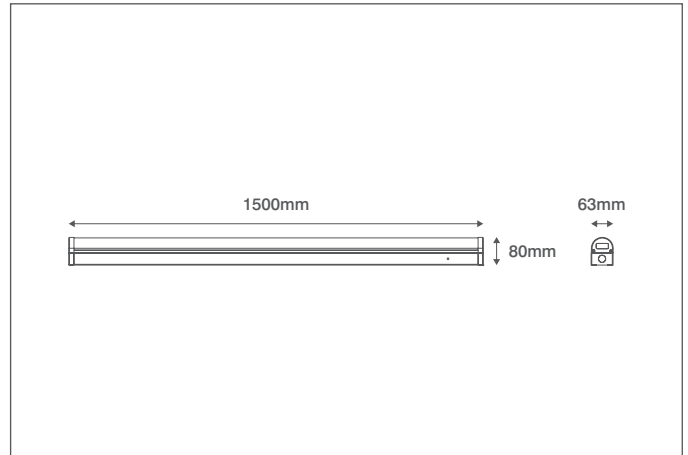

General Information

Dimensions (mm)	1500 (L) x 63 (W) x 80 (D)
Materials	Base: Powdercoated Steel; Opaque Diffuser: Polycarbonate
Base Finish	White (RAL 9010)
Product Weight (Kg)	1.6
Ingress Protection	IP20
Impact Rating (IK)	08
Mounting	Ceiling or Wall
Warranty (Years)	5

Luminaire Output


LED Wattage	42	48	54	60
Typical Luminous Flux	4410	5040	5670	6300
Efficacy	105	105	105	105
Circuit Wattage	42	48	54	60
Beam Angle (°)	120			
Colour Temperature (K)	4000			
Flicker Free	Yes			
Colour Rendering Index (CRI)	>80			
Energy Classification	F			
LED Lifetime (L70)	50000			

Supply & Power Information


Input Voltage & Frequency (V~ / Hz)	200-240 50
Safety Class	I
Surge Protection Installed	
Circuit Wattage (W)	42/48/54/60
Input Current (A)	300
Inrush Current	0.3A (<0.5S)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+80
Input Terminations	3 Pole Push Fit Terminals

Dimming Information


Dimmable	No
----------	----

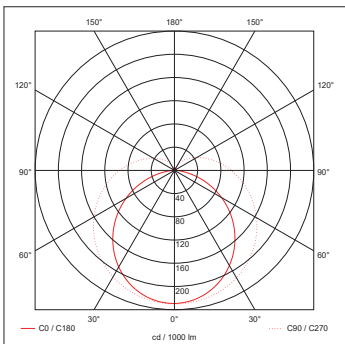


42W

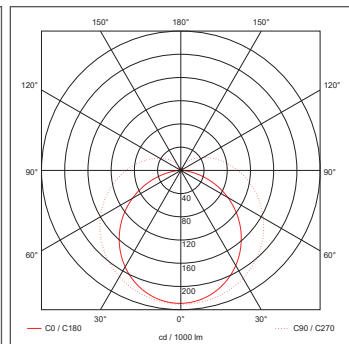

48W

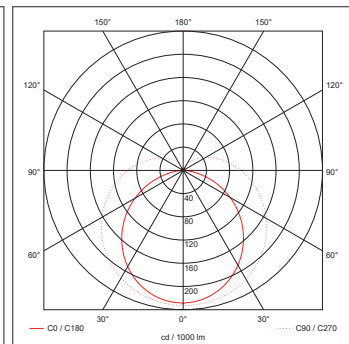

54W

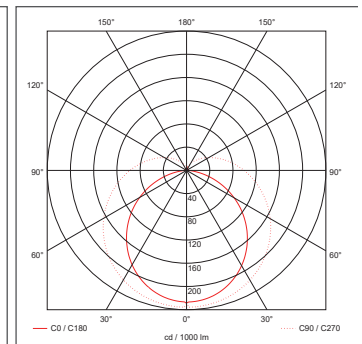

60W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640


E: sales@oviaUK.com | W: oviaUK.com

INCEPTOR® B-LITE

Technical Specification

Product Code: OV82180

Description: 50-70W 1800mm Multi-Current Linear LED Batten

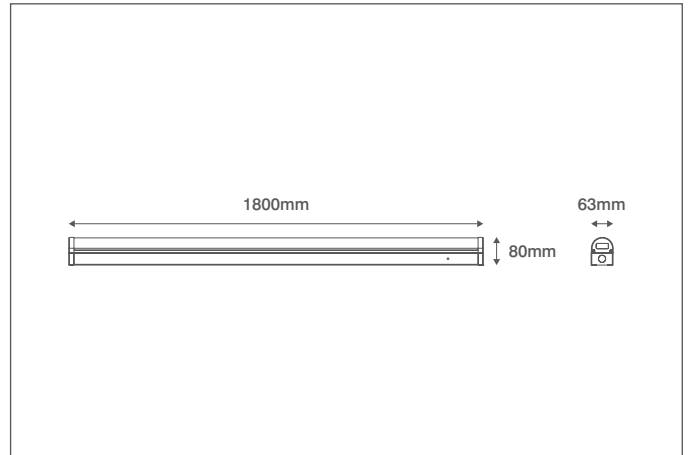

General Information

Dimensions (mm)	1800 (L) x 63 (W) x 80 (D)
Materials	Base: Powdercoated Steel; Opaque Diffuser: Polycarbonate
Base Finish	White (RAL 9010)
Product Weight (Kg)	1.9
Ingress Protection	IP20
Impact Rating (IK)	08
Mounting	Ceiling or Wall
Warranty (Years)	5

Luminaire Output


LED Wattage	50	58	64	70
Typical Luminous Flux	5250	6090	6720	7350
Efficacy	105	105	105	105
Circuit Wattage	50	58	64	70
Beam Angle (°)	120			
Colour Temperature (K)	4000			
Flicker Free	Yes			
Colour Rendering Index (CRI)	>80			
Energy Classification	F			
LED Lifetime (L70)	50000			

Supply & Power Information


Input Voltage & Frequency (V~ / Hz)	200-240 50
Safety Class	I
Surge Protection Installed	
Circuit Wattage (W)	50/58/64/70
Input Current (A)	360
Inrush Current	0.36A (<0.5S)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+80
Input Terminations	3 Pole Push Fit Terminals

Dimming Information


Dimmable	No
----------	----

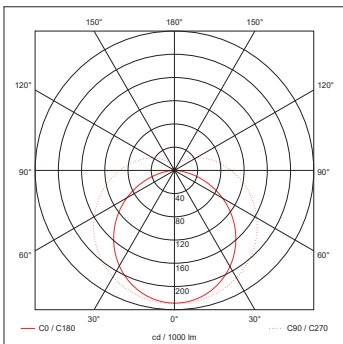


50W

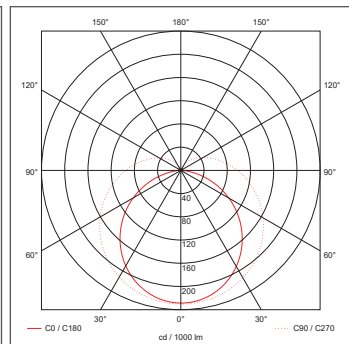

58W

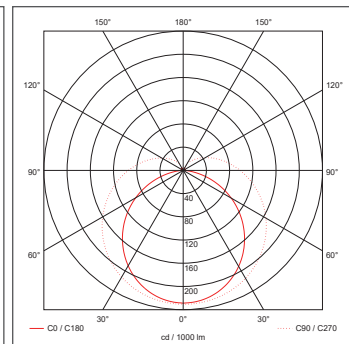

64W

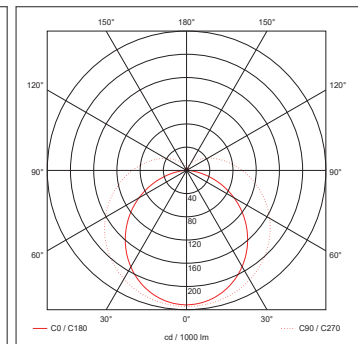

70W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com