


# SPIKE LIGHTS SPECIFICATION SHEET

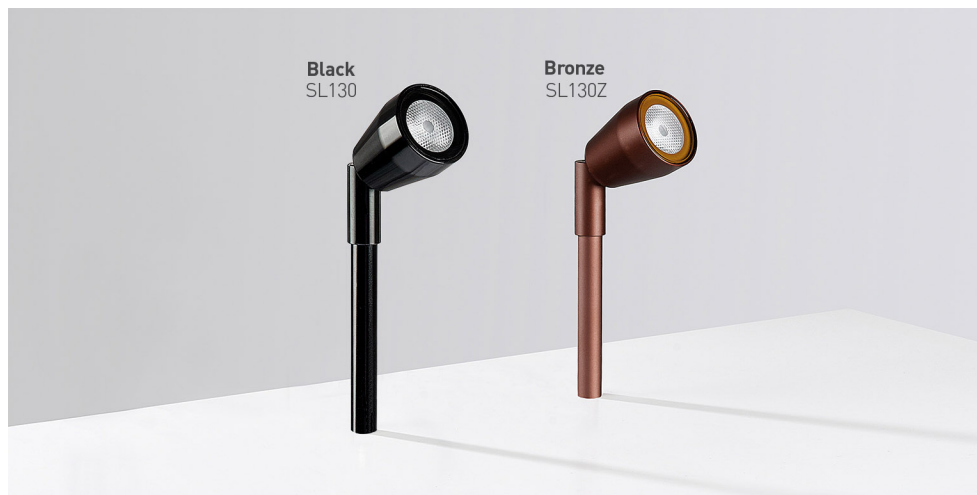

## SL130

1W LED spike light

### FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	90°
Input	350mA / 700mA
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

### INSTALLATION INFORMATION

Bathroom zone	1
Construction Material	Anodised aluminium
Weight	405g
Maximum ambient temperature	35°C
Electric Class (1, 2, 3)	3

### PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	350mA			700mA		
					lm	lm/W	lx @ 1m	lm	lm/W	lx @ 1m
SL13040	Black Anodised Aluminium	1W(350mA) 2W(700mA)	4000K	26°	95	95	267	140	70	393
SL13030	Black Anodised Aluminium	1W(350mA) 2W(700mA)	3000K	26°	75	75	210	135	68	379
SL13027	Black Anodised Aluminium	1W(350mA) 2W(700mA)	2700K	26°	70	70	196	120	60	337
SL130ZMBX27	Bronze Anodised Aluminium	1W(350mA) 2W(700mA)	2700K	26°	70	70	196	120	60	337
SL130ZMBX30	Bronze Anodised Aluminium	1W(350mA) 2W(700mA)	3000K	26°	75	75	210	135	68	379
SL130ZMBX40	Bronze Anodised Aluminium	1W(350mA) 2W(700mA)	4000K	26°	95	95	267	140	70	393

### WIRING INFORMATION

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

### LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	220V-240V	Yes	No	1	1	9
PLR/350 1-5	220V-240V	Yes	No	1	1	5
PLD UNI-DRIVE 700MA	220V-240V	Yes	Yes (1-10V)	2	1	10



COLLINGWOOD  
LIGHTING

01604 495 151  
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

### GUARANTEE / WARRANTY

7 year extended warranty

### FEATURES & BENEFITS

Long spike included for extra stability


Robust cable for outdoor use

Small & discreet

IP65 allows for use in exterior spaces

The Spike Lights can be run on 350mA or 700mA drivers

### Beam angle: 26°

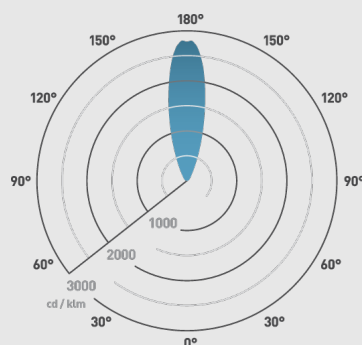

Ø42mm



# SPIKE LIGHTS SPECIFICATION SHEET

---


## ACCESSORIES


JB2 / JB4 / JB6	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately
PDC/GRID DIMMER	1-10V dimmer module	Sold Separately




**COLLINGWOOD**  
LIGHTING

**01604 495 151**  
[collingwoodlighting.com](http://collingwoodlighting.com)

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

---

## SL130

The SL130 is our smallest, most stylish and most discreet spike light for installing by pathways or among the flower beds of your garden. The casing and spike are made from anodised aluminium making them ideal for long periods outside. Using a 1W high-power LED and available in three colour temperatures; 2700K, 3000K and 4000K, this subtle spike light will enhance any environment.

For more powerful options take a look at the SL040A and SL220A.