


SPIKE LIGHTS SPECIFICATION SHEET

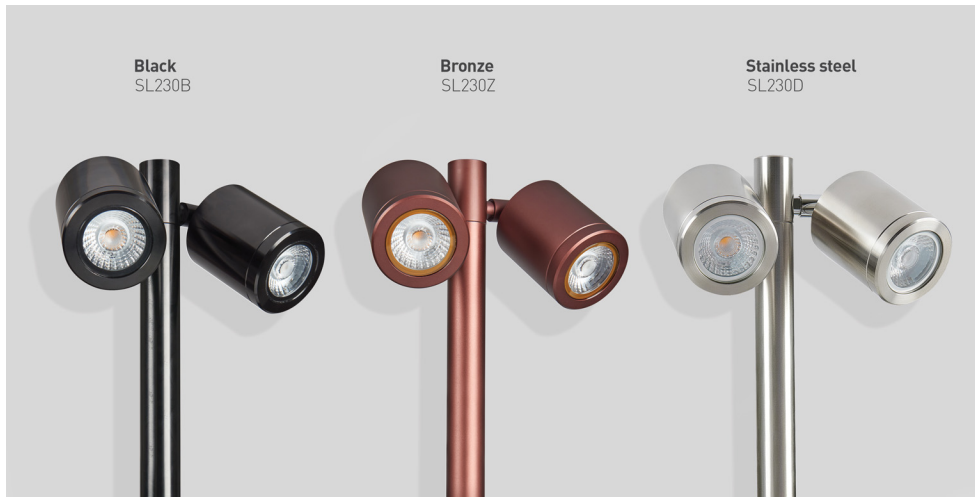

**COLLINGWOOD
LIGHTING**

01604 495 151
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

SL230

Mains voltage LED twin pole spike light

FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	90°
Rotation angle	330°
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Bathroom zone	-
Inrush Current	120A 37µs
Construction Material	Anodised aluminium
Weight	1577g
Maximum ambient temperature	35°C
Electric Class [1, 2, 3]	1

GUARANTEE / WARRANTY

7 year extended warranty available

FEATURES & BENEFITS

Adjustable pole-mounted twin heads are perfect for illuminating paths, steps and trees

Easily ground mounted with spiked pole and single cable for quick installation

Elegant and discreet black and bronze finishes

Mains voltage for easy installation

Highly efficient: up to 93lm/W

7-year warranty

PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
SL230ZWB27	Bronze Anodised Aluminium	11.4W	2700K	40°	1030	2 x 90	2 x 1171
SL230ZWB30	Bronze Anodised Aluminium	11.4W	3000K	40°	1040	2 x 91	2 x 1182
SL230ZWB40	Bronze Anodised Aluminium	11.4W	4000K	40°	1060	2 x 93	2 x 1205
SL230BWB27	Black Anodised Aluminium	11.4W	2700K	40°	1030	2 x 90	2 x 1171
SL230BWB30	Black Anodised Aluminium	11.4W	3000K	40°	1040	2 x 91	2 x 1182
SL230BWB40	Black Anodised Aluminium	11.4W	4000K	40°	1060	2 x 93	2 x 1205
SL230DWB27	Stainless steel	11.4W	2700K	40°	1030	2 x 90	2 x 1171
SL230DWB30	Stainless steel	11.4W	3000K	40°	1040	2 x 91	2 x 1182
SL230DWB40	Stainless steel	11.4W	4000K	40°	1060	2 x 93	2 x 1205

WIRING INFORMATION

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	220V-240V	N/A	N/A	N/A	N/A	N/A

ACCESSORIES

JB5	Gel filled waterproof connector	Sold Separately
GH220	Simple hood to reduce glare whilst maintaining a good light distribution	Sold Separately
GS220		

Beam angle: 40°

