


# SPIKE LIGHTS SPECIFICATION SHEET

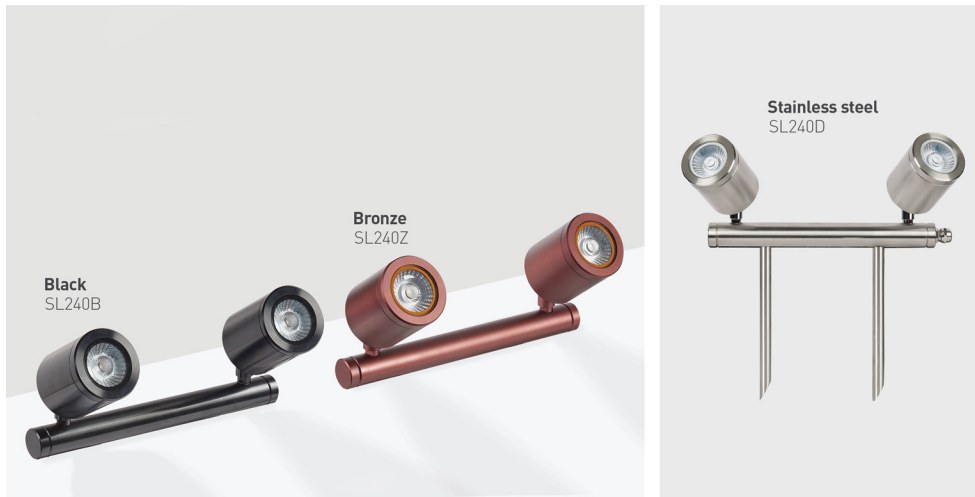

## SL240

Mains voltage LED twin bar spike light

### FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	90°
Rotation angle	330°
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

### INSTALLATION INFORMATION

Bathroom zone	-
Inrush Current	120A 37µs
Construction Material	Anodised aluminium
Weight	1401g
Maximum ambient temperature	35°C
Electric Class [1, 2, 3]	1

### PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
SL240ZWB27	Bronze Anodised Aluminium	11.4W	2700K	40°	1030	2 x 90	2 x 1171
SL240ZWB30	Bronze Anodised Aluminium	11.4W	3000K	40°	1040	2 x 91	2 x 1182
SL240ZWB40	Bronze Anodised Aluminium	11.4W	4000K	40°	1060	2 x 93	2 x 1205
SL240BWB27	Black Anodised Aluminium	11.4W	2700K	40°	1030	2 x 90	2 x 1171
SL240BWB30	Black Anodised Aluminium	11.4W	3000K	40°	1040	2 x 91	2 x 1182
SL240BWB40	Black Anodised Aluminium	11.4W	4000K	40°	1060	2 x 93	2 x 1205
SL240DWB27	Stainless Steel	11.4W	2700K	40°	1030	2 x 90	2 x 1171
SL240DWB30	Stainless Steel	11.4W	3000K	40°	1040	2 x 91	2 x 1182
SL240DWB40	Stainless Steel	11.4W	4000K	40°	1060	2 x 93	2 x 1205

### WIRING INFORMATION

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

### LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	220V-240V	N/A	No	N/A	N/A	N/A

### ACCESSORIES

JB5	Gel filled waterproof connector	Sold Separately
GH220	Simple hood to reduce glare whilst maintaining a good light distribution	Sold Separately
GS220		



COLLINGWOOD  
LIGHTING

01604 495 151  
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

### GUARANTEE / WARRANTY

7 year extended warranty available

### FEATURES & BENEFITS

Adjustable bar-mounted twin heads, ideal for discreet illumination of shrubbery, trees and other landscape features

Easily ground mounted with two spikes and single cable for quick installation

Elegant and discreet black and bronze finishes

Mains voltage for easy installation

Highly efficient: up to 93lm/W

7-year warranty

### Beam angle: 40°

