


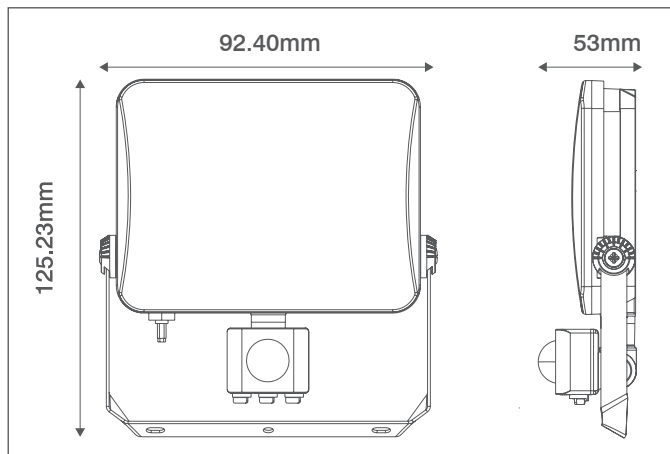

General Information

Materials	Body: Powder Coated Aluminium; Diffuser: Polycarbonate
Colour	Black
Product Weight (Kg)	0.13
Ingress Protection	IP65
Impact Rating (IK)	06
Flammability Rating	UL94-V2
Mounting	Wall
Warranty (Years)	3

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	10
Input Current (mA)	44
Inrush Current/Time	4.65A (0.057ms)
Power Factor	>0.8
Operating Temperature (°C)	+25
Input Mains Cable	3 x 1mm ² H05RN-F (1 Metre)

Luminaire Output


Colour Temperature (K)	3000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	850
Efficacy (lm/W)	85
Beam Angle (°)	100
LED Lifetime (L70) (Hours)	20000


Sensor Information

Maximum Mounting Height (m)	2.5
Detection Distance (m)	8
Detection Angle (°)	120
Light Level Settings (Lux)	10 to 2000
Time Delay Settings	10 Secs to 3 Mins

Dimming Information

Dimmable	No
----------	----

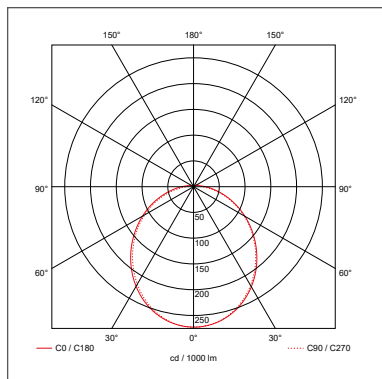

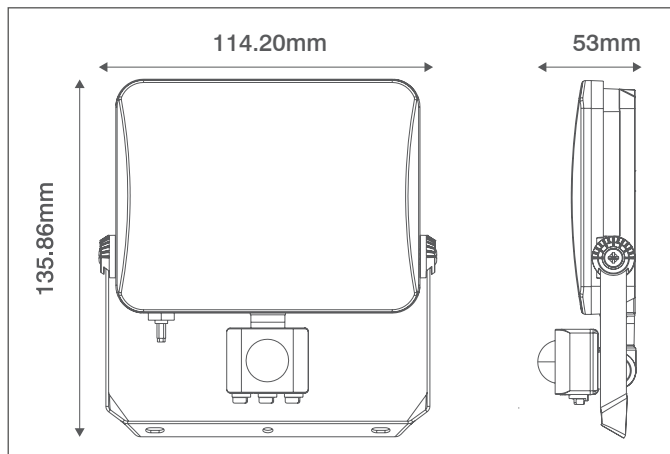

General Information

Materials	Body: Powder Coated Aluminium; Diffuser: Polycarbonate
Colour	Black
Product Weight (Kg)	0.18
Ingress Protection	IP65
Impact Rating (IK)	06
Flammability Rating	UL94-V2
Mounting	Wall
Warranty (Years)	3

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	20
Input Current (mA)	87
Inrush Current/Time	5.78A (0.056ms)
Power Factor	>0.8
Operating Temperature (°C)	+25
Input Mains Cable	3 x 1mm ² H05RN-F (1 Metre)

Luminaire Output


Colour Temperature (K)	3000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	1700
Efficacy (lm/W)	85
Beam Angle (°)	100
LED Lifetime (L70) (Hours)	20000


Sensor Information

Maximum Mounting Height (m)	2.5
Detection Distance (m)	8
Detection Angle (°)	120
Light Level Settings (Lux)	10 to 2000
Time Delay Settings	10 Secs to 3 Mins

Dimming Information

Dimmable	No
----------	----

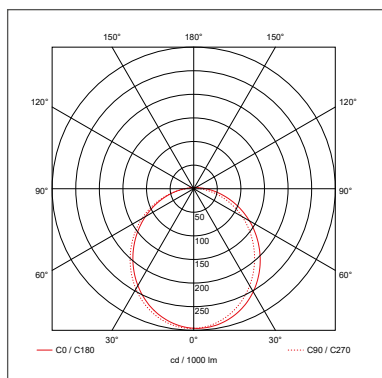

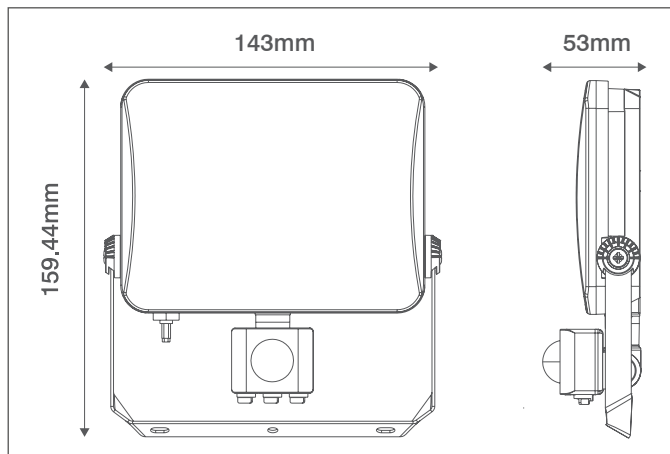

General Information

Materials	Body: Powder Coated Aluminium; Diffuser: Polycarbonate
Colour	Black
Product Weight (Kg)	0.22
Ingress Protection	IP65
Impact Rating (IK)	06
Flammability Rating	UL94-V2
Mounting	Wall
Warranty (Years)	3

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	30
Input Current (mA)	130
Inrush Current/Time	6.16A (0.062ms)
Power Factor	>0.9
Operating Temperature (°C)	+25
Input Mains Cable	3 x 1mm ² H05RN-F (1 Metre)

Luminaire Output


Colour Temperature (K)	3000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	2550
Efficacy (lm/W)	85
Beam Angle (°)	100
LED Lifetime (L70) (Hours)	20000

Sensor Information

Maximum Mounting Height (m)	2.5
Detection Distance (m)	8
Detection Angle (°)	120
Light Level Settings (Lux)	10 to 2000
Time Delay Settings	10 Secs to 3 Mins

Dimming Information

Dimmable	No
----------	----

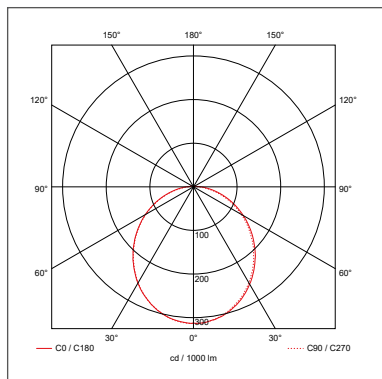

OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section




DoC



Installation



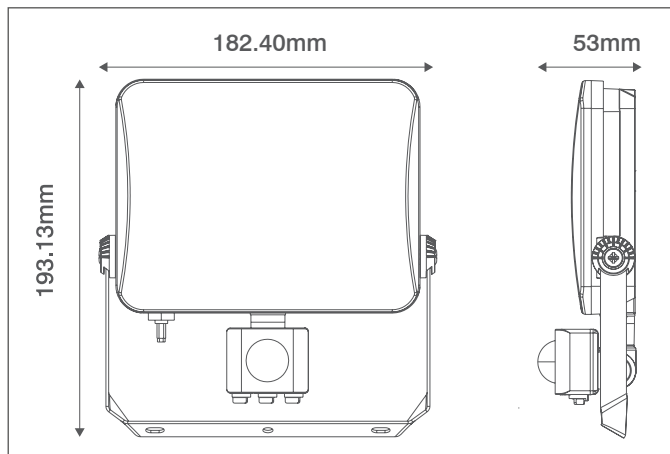

General Information

Materials	Body: Powder Coated Aluminium; Diffuser: Polycarbonate
Colour	Black
Product Weight (Kg)	0.33
Ingress Protection	IP65
Impact Rating (IK)	06
Flammability Rating	UL94-V2
Mounting	Wall
Warranty (Years)	3

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	50
Input Current (mA)	217
Inrush Current/Time	8.64A (0.076ms)
Power Factor	>0.9
Operating Temperature (°C)	+25
Input Mains Cable	3 x 1mm ² H05RN-F (1 Metre)

Luminaire Output

Colour Temperature (K)	3000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	4250
Efficacy (lm/W)	85
Beam Angle (°)	100
LED Lifetime (L70) (Hours)	20000

Sensor Information

Maximum Mounting Height (m)	2.5
Detection Distance (m)	8
Detection Angle (°)	120
Light Level Settings (Lux)	10 to 2000
Time Delay Settings	10 Secs to 3 Mins

Dimming Information

Dimmable	No
----------	----

