

# WALL LIGHTS SPECIFICATION SHEET



**COLLINGWOOD**  
LIGHTING

01604 495 151  
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

## WL013

IP65, 390lm up-down wall light

### FEATURES

IK rating	IK04
IP rating	IP65
Colour flexibility	Fixed colour
Input	220-240V 50/60Hz
LED Lifetime	30,000h L70 B10
CRI	>80Ra
SDCM	<6

### INSTALLATION INFORMATION

Inrush Current	20A 0.5ms
Construction Material	Powder coated aluminium
Weight	467g
Maximum ambient temperature	40°C
Electric Class (1, 2, 3)	1

### GUARANTEE / WARRANTY

5 year extended warranty available

### FEATURES & BENEFITS

Ideal for framing doorways and entrances

Straight to mains screw terminals

Durable powder coated aluminium in contemporary black or grey finish

Up & down light for creating a feature of perimeters and entrances

Sleek curved design

High resistance to weather conditions

Integral bracket for easy installation


### PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
WL013X30	Black RAL9011	6.5W	3000K	107°/91°	390	60	99
WL013G30	Grey RAL7022	6.5W	3000K	107°/91°	390	60	99

### ACCESSORIES

No accessories required

Beam angle: 107°/91°

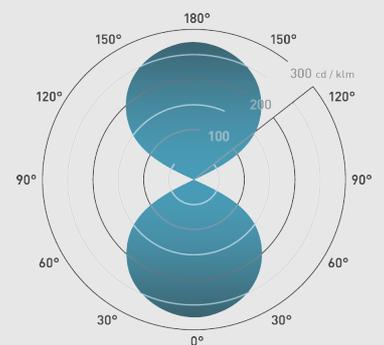

90mm

51.5mm  
36.5mm

150mm

