



Prism Pro Mini Fire Rated Anti-Glare Downlight



- Miniature IP65 Fire rated architectural downlight suitable for residential and hospitality applications
- CCT selectable between 2700K, 3000K, 4000K and 6000K
- Ultra slim detachable driver with loop-in, loop-out push fit terminals provide an easy and efficient installation
- Can be used as the sole light source or as a complimentary product to Prism Pro / Prism Pro Anti-Glare
- Supplied with matt white bezel as standard. Chrome, satin chrome and matt black bezels sold separately
- Anti-glare design to create visual comfort
- Low profile design and arched remote driver allows installation into shallow ceiling voids
- Fully tested for 30, 60 and 90 minute ceiling types to meet Part B of Building Regulations
- Fully tested to meet Part C (moisture), Part E (acoustic) and Part L (energy) of Building Regulations

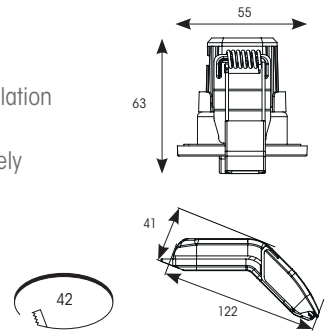

Powered by
CASAMBI

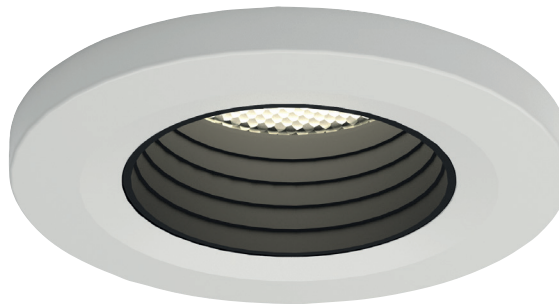

Available bezel accessories
White Bezel with white insert, Black Bezel with matt black insert, Chrome Bezel with matt black insert and Satin Chrome Bezel with matt black insert

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220/240V	50/60Hz	-20°C to 35°C	L70 54,000	Ra 80	6	55°	2	IP65

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR
APRIPMINIAG/1	CCT Selectable	5W	2700/3000/4000/6000K	280lm (4000K)	60lm (4000K)	20

* UGR Value based on (4H - 8H)

CODE (ACCESSORIES)	DESCRIPTION
APRIPMINIAG/BZ/WW	White Trim Bezel with White Insert
APRIPMINIAG/BZ/BB	Matt Black Trim Bezel with Matt Black Insert
APRIPMINIAG/BZ/CHB	Chrome Trim Bezel with Matt Black Insert
APRIPMINIAG/BZ/SCB	Satin Chrome Trim Bezel with Matt Black Insert

CODE (ACCESSORIES)	DESCRIPTION
ACFLP/3	LED Emergency Lighting Pack